

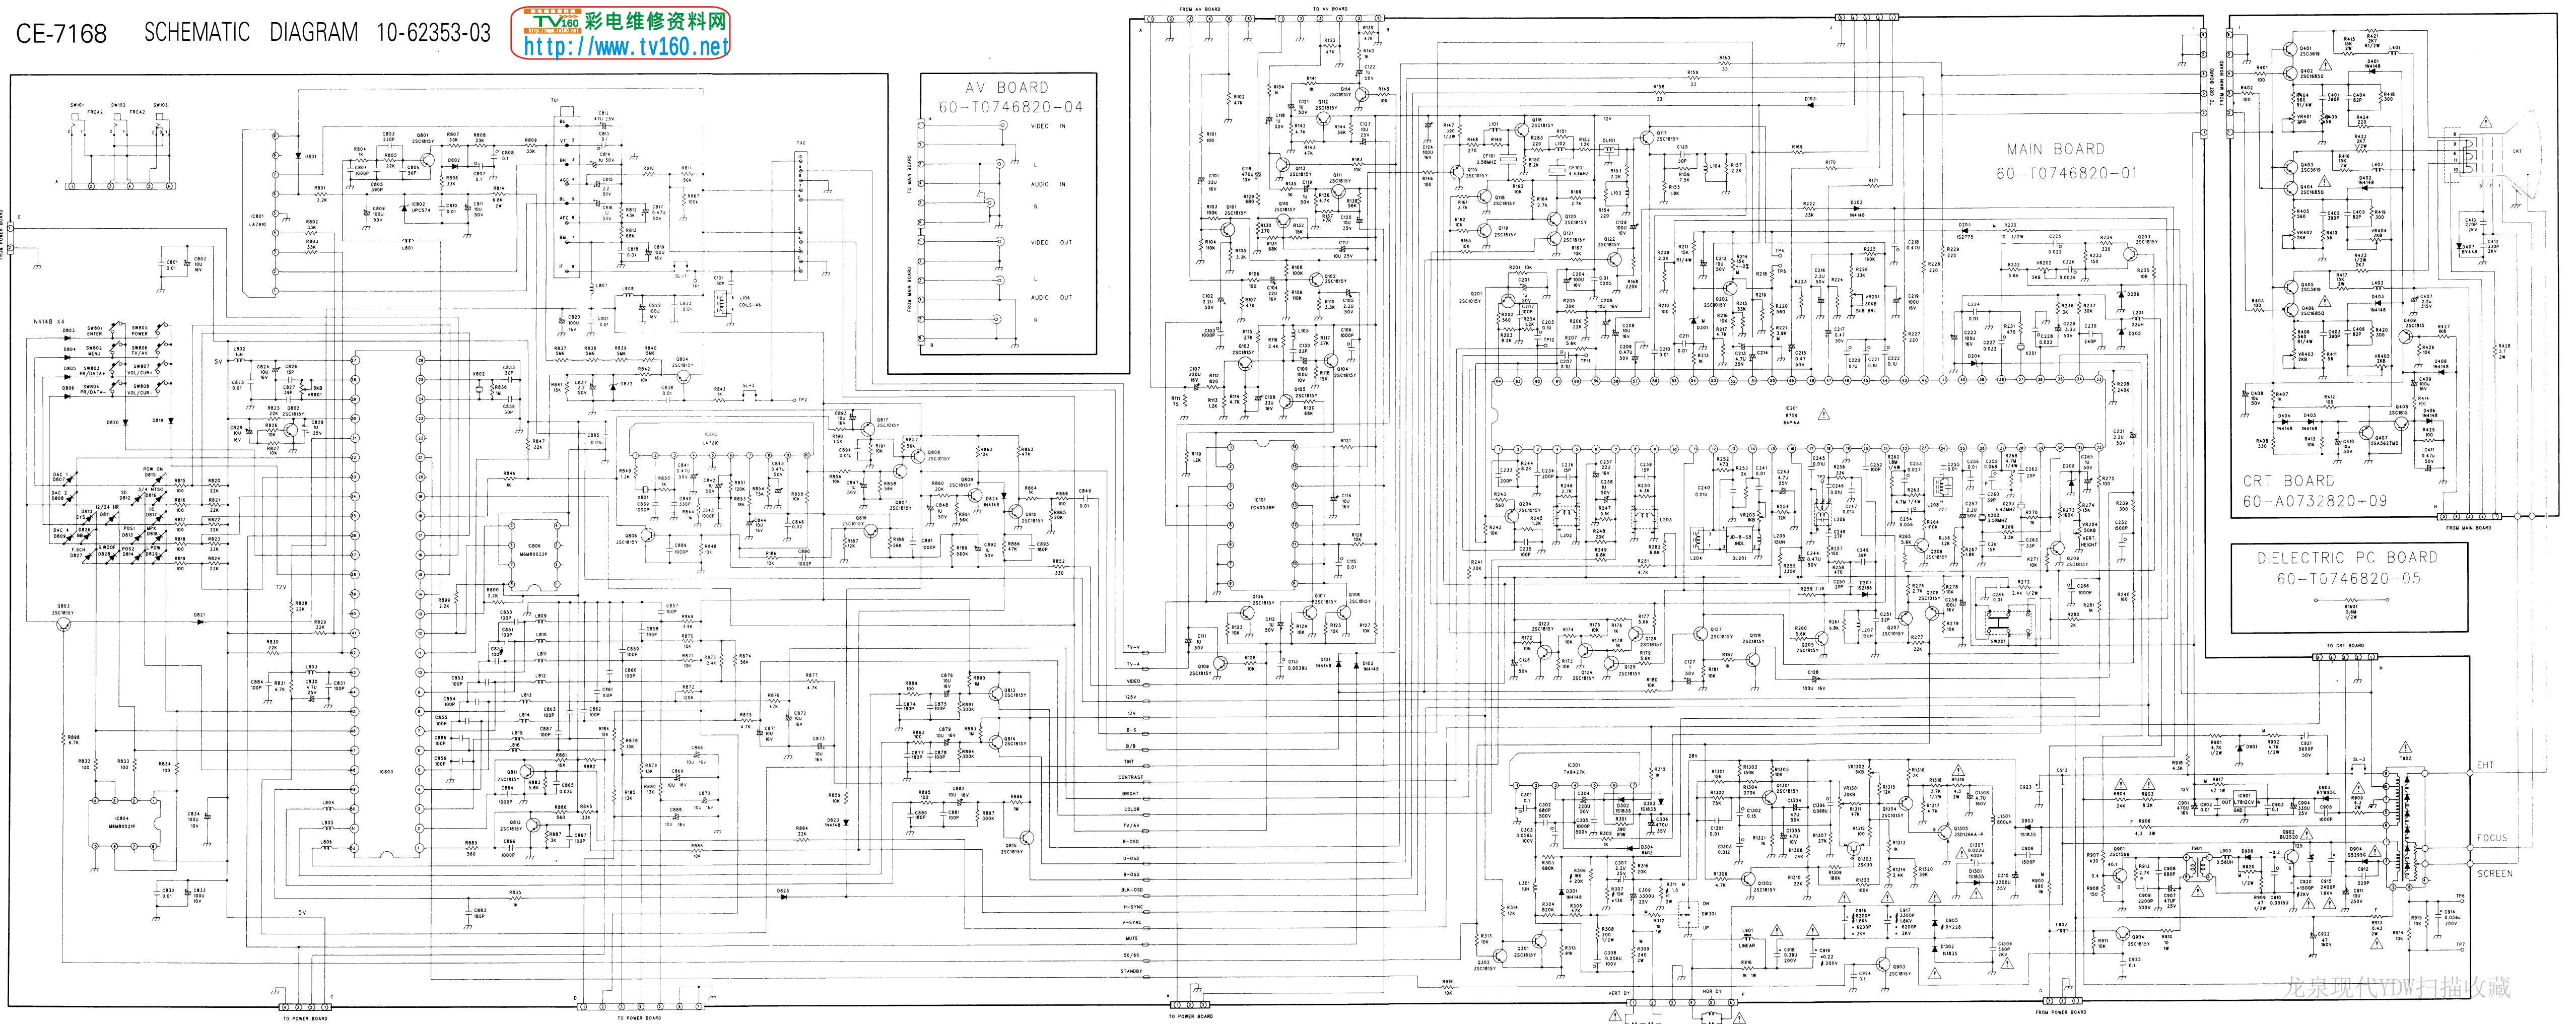


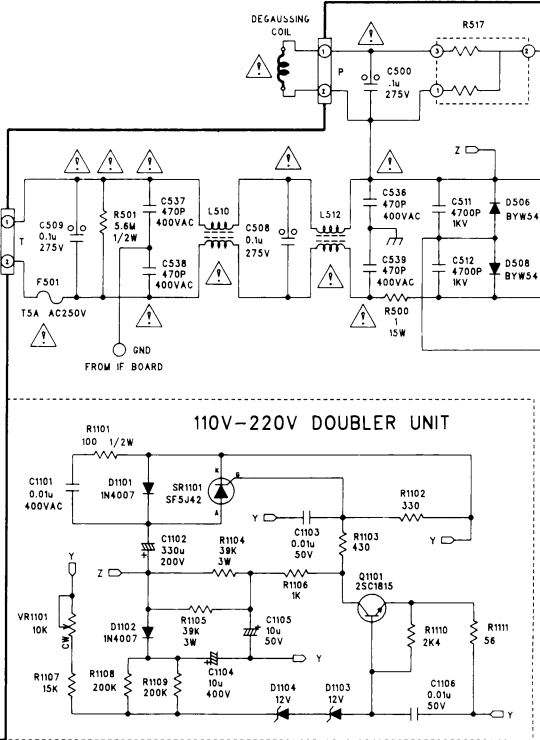


CE-7168



POWER SUPPLY
AUDIO AMP.
KARAOKE
POWER SWITCH
SUPER WOOFER



POWER SUPPLY UNIT

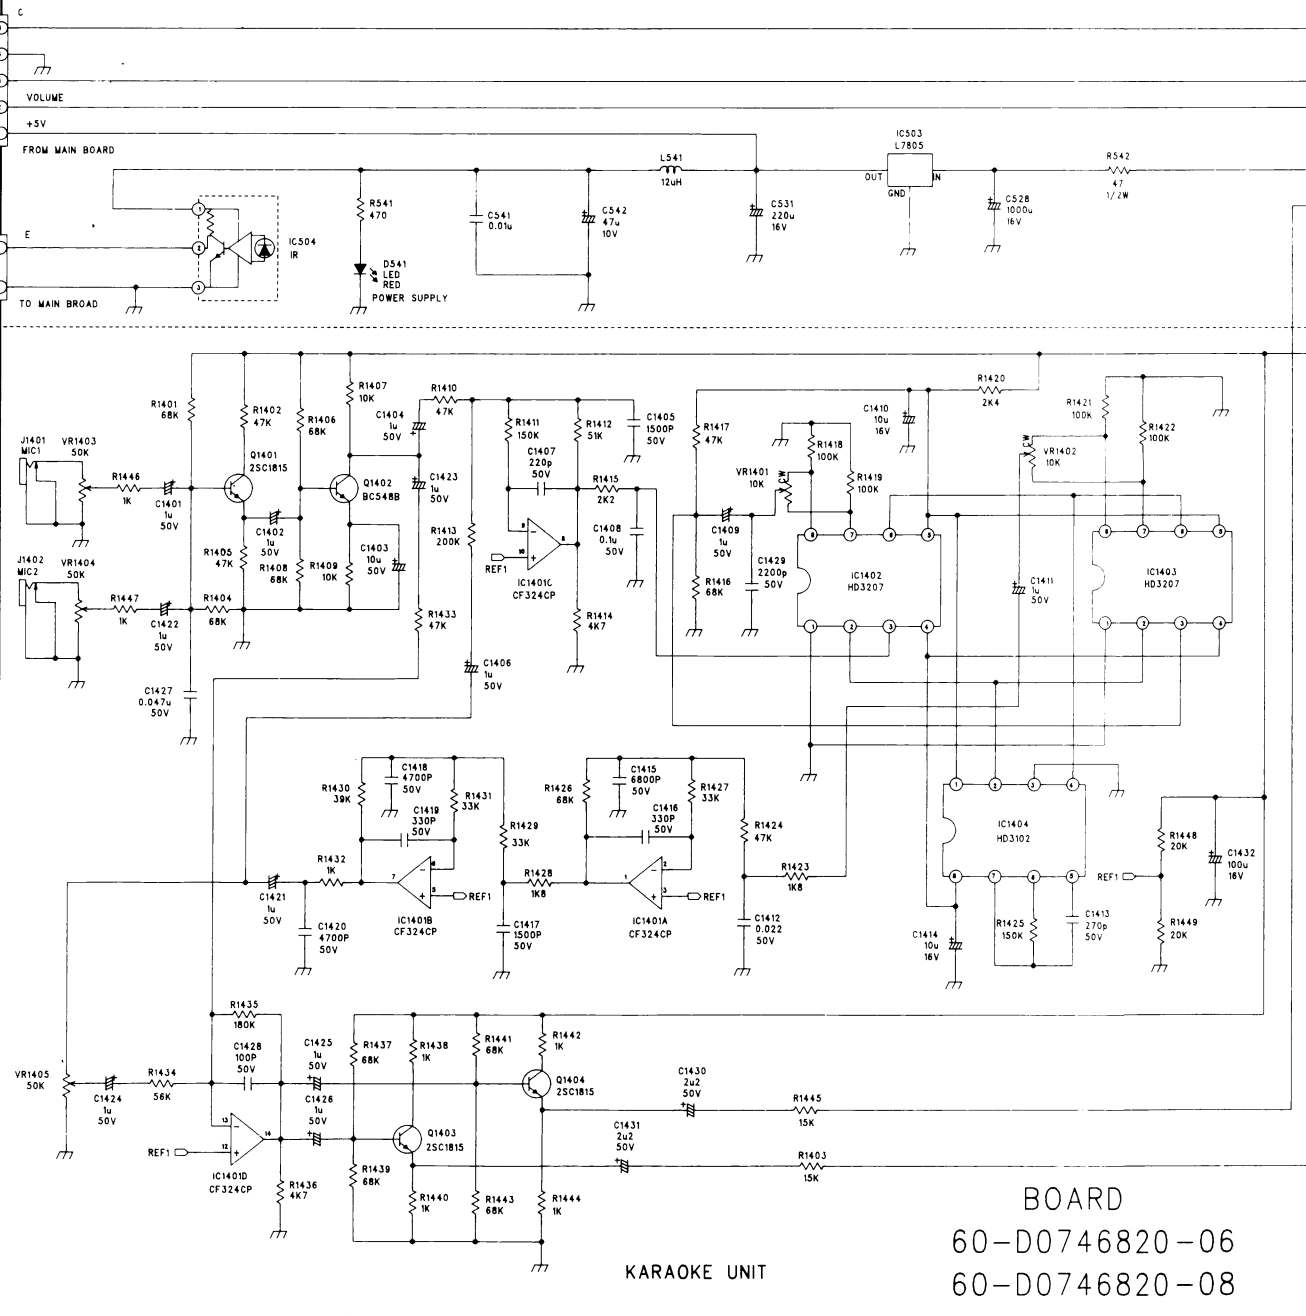

BOARD
60-D0746820-06
60-D0746820-08

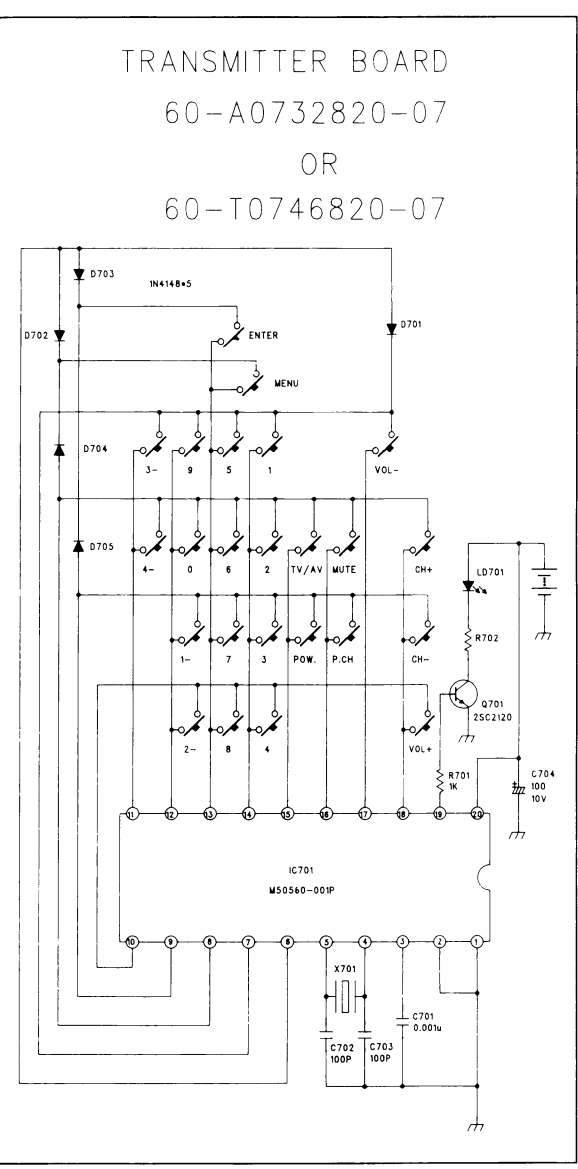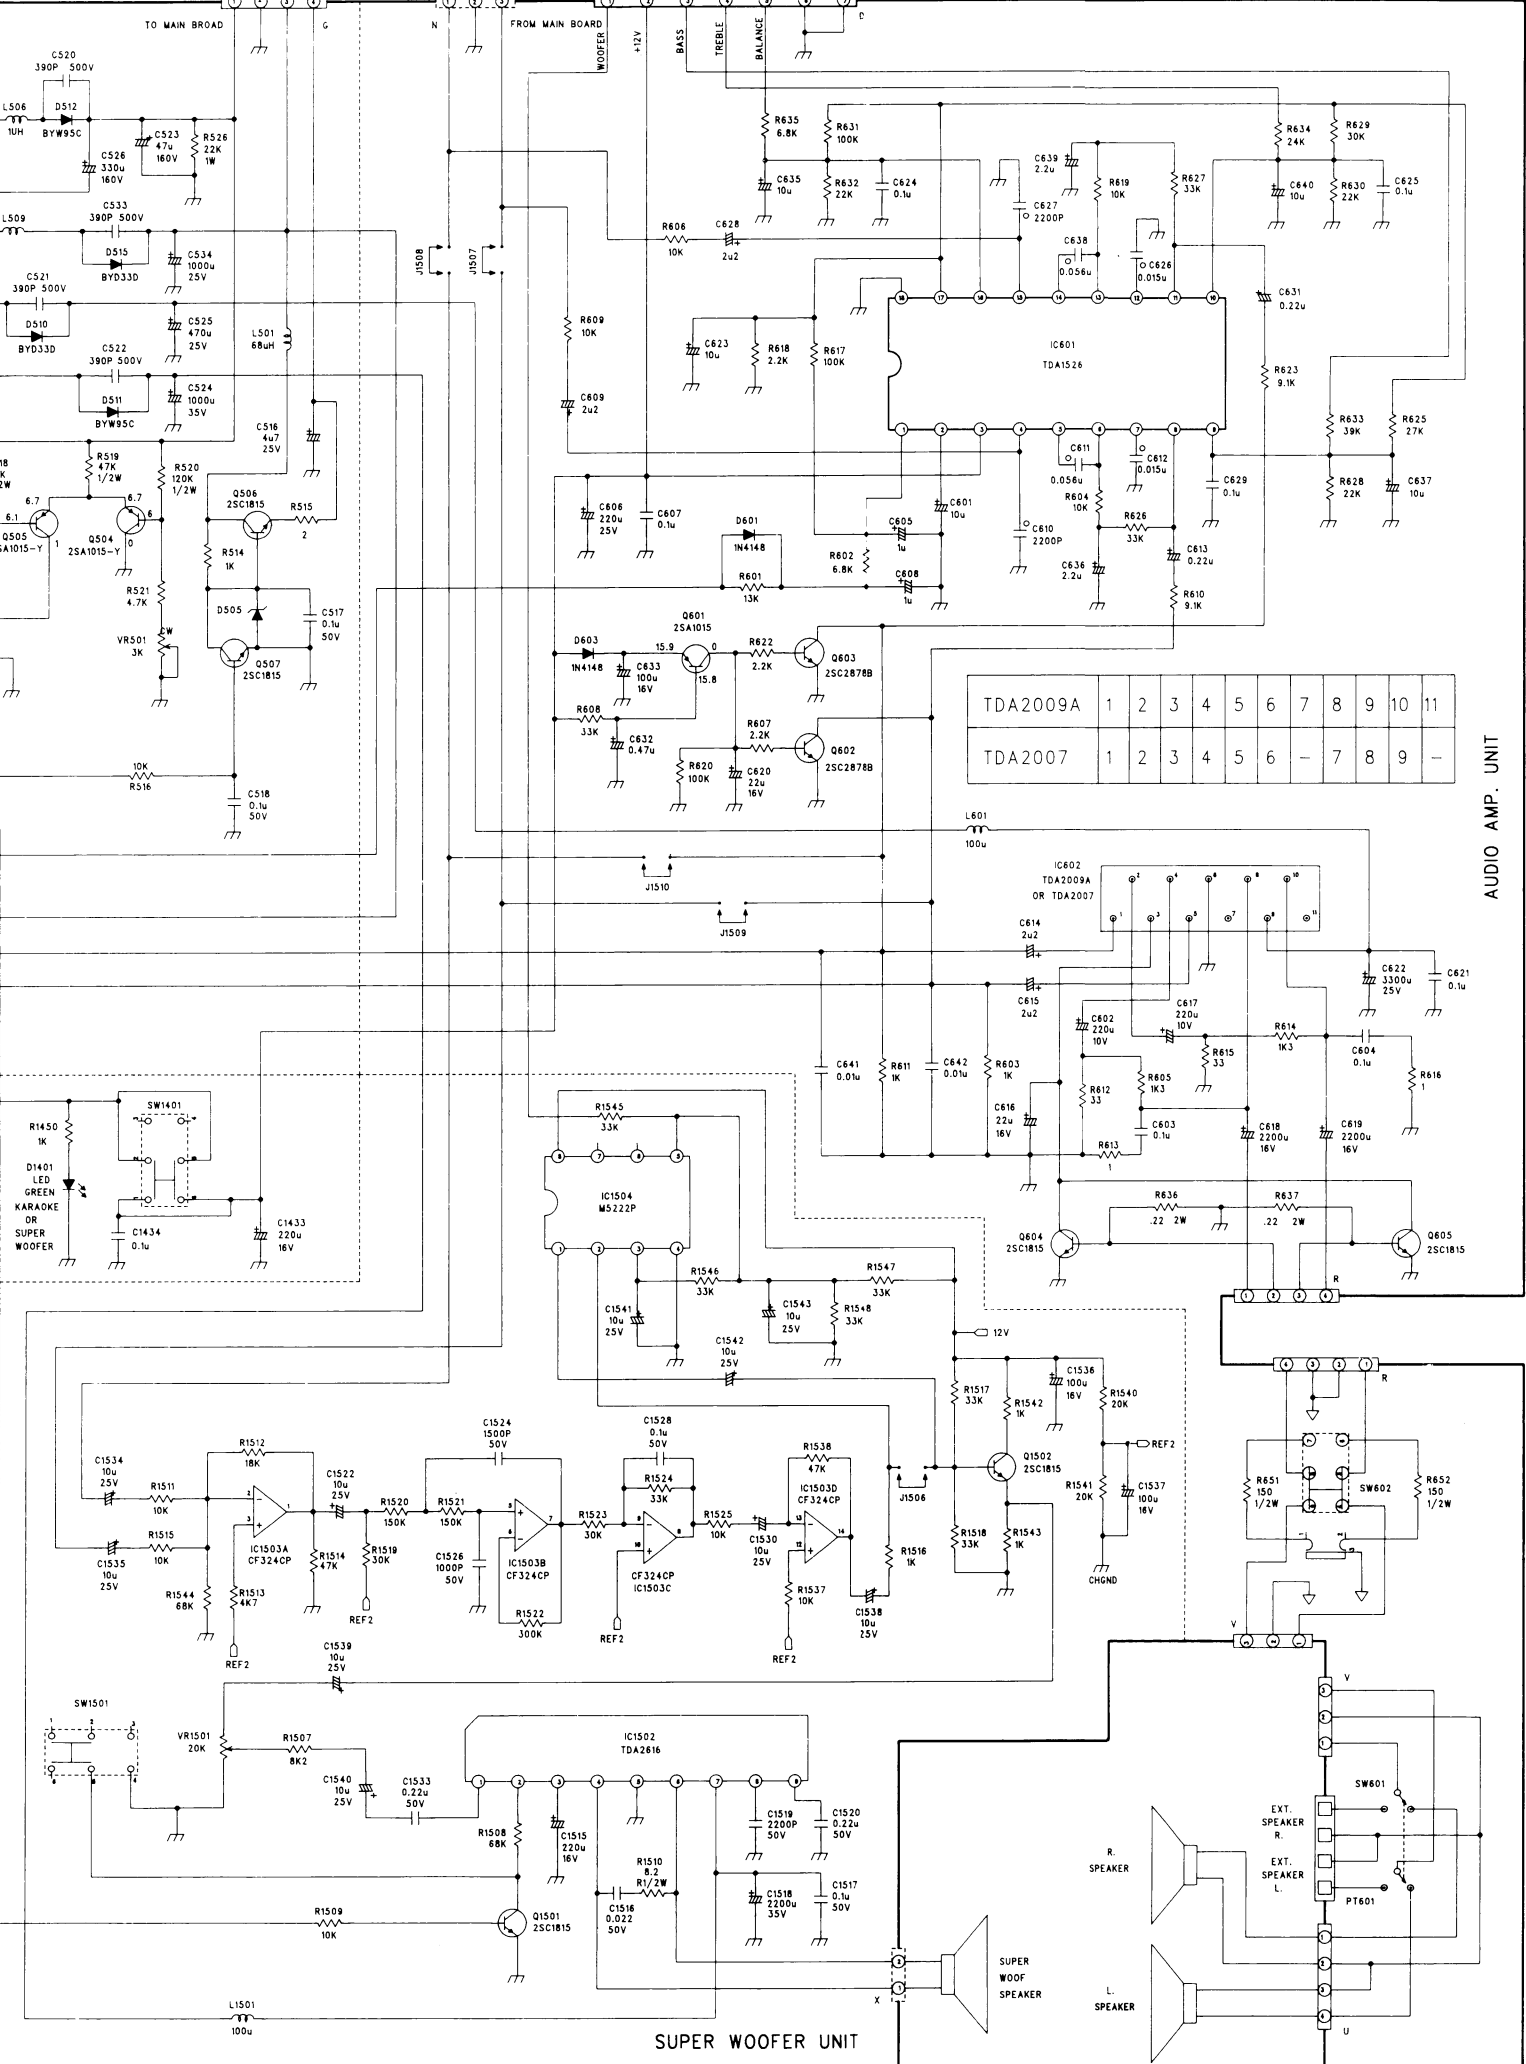

NOTICE:
SINCE THIS IS A BASIC CIRCUIT DIAGRAM THE VALUE OF COMPONENTS ARE SUBJECT
TO BE CHANGE FOR IMPROVEMENT .
WARNING:
BEFORE SERVICING THIS CHASSIS, READ THE X-RAY RADIATION PRECAUTION &
PRODUCTS SAFETY NOTICE OF THIS MANUAL .
CAUTION:
THE WARNING SYMBOLS IN THE SCHEMATIC DIAGRAM AND THE PART LIST DESIGNATE
COMPONENTS WHICH HAVE SPACIAL CHARACTERISTICS IMPORTANT FOR SAFETY
SHOUD BE REPLACED ONLY WITH TYPES IDENTICAL TO THOSE IN THE ORIGINAL
CIRCUIT OR SPECIFIED IN THE PARTS LIST BEFORE REPLACING ANY OF THESE
COMPONENTS, READ CAREFULLY THE PRODUCTS SAFETY NOTICE OF THE MANUAL
DO NOT DEGRADE THE SAFETY OF THE RECEIVER THROUGH IMPROPER SERVICING .
NOTE:
1 VOLTAGES ARE MEASURED WITH DVM FROM POINT INDICATED TO CHASSIS
GROUND, USING COLOR BAR SIGNAL WITH ALL CONTROLS AT NORMAL POSITION .
2 WAVEFORMS ARE MEASURED WITH SYNCHROSCOPE FROM POINT INDICATED TO
CHASSIS GROUND, USING COLOR BAR SIGNAL WITH ALL CONTROLS AT NORMAL
3 ALL RESISTORS ARE 1/8W +/-5% CARBON FLIM RESISTOR UNLESS OTHERWISE
LISTED . RESISTANCE UNIT IS IN OHM

RESISTOR TYPES	SYMBOL	CAPACITOR TYPES	SYMBOL
CARBON FILM		CERAMIC	
CARBON COMPOSITION		TANTALUM	
METAL OXIDE +/-5%		POLYESTER FILM	
METAL OXIDE +/-2%		POLYPROPYLEN FLIM	
FUSIBLE		METAL POLYESTER FILM	
NON INFLAMMABLE		POLY POLYESTER FILM	
PTC THERMISTOR		ELECTROLYTIC	
VARIABLE		TRIMMER	

