




+12V_in	12V电源
+5V_stb	待机5V
BL-ON/OFF	背光开关
BL-ADJUST	背光亮度
STANDBY	待机

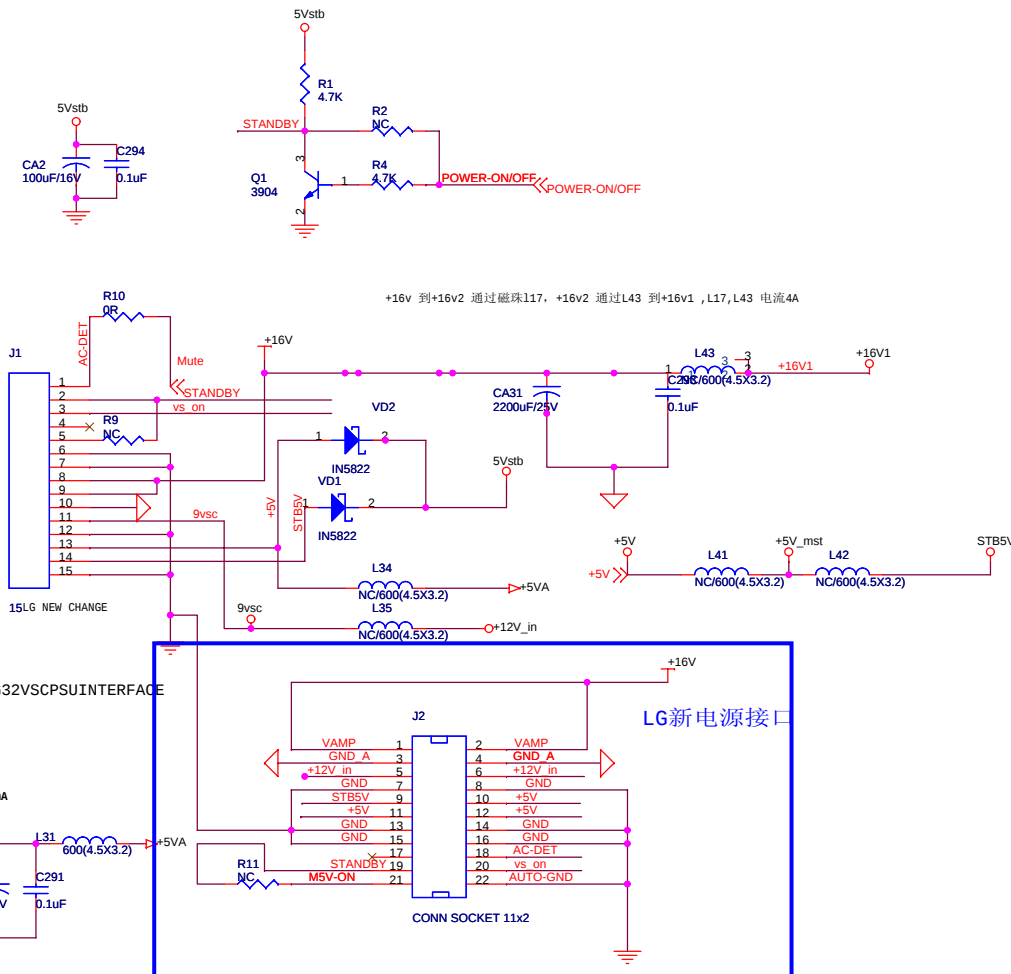


STB5V 直接到5vstb: AUTO-GND 接 0 R 到地, 便于选择: +5v 到VCC_USB5V L40 的电流需要4a 以上确认。

T0 Inverter Board

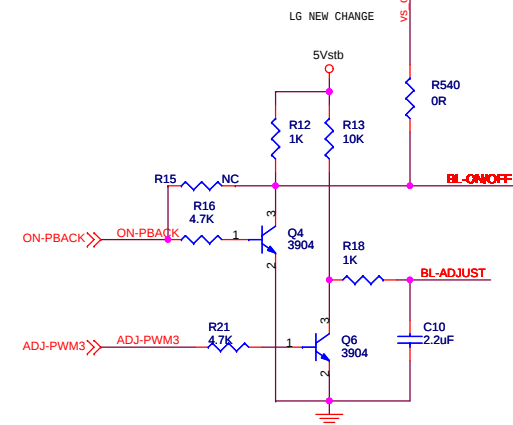



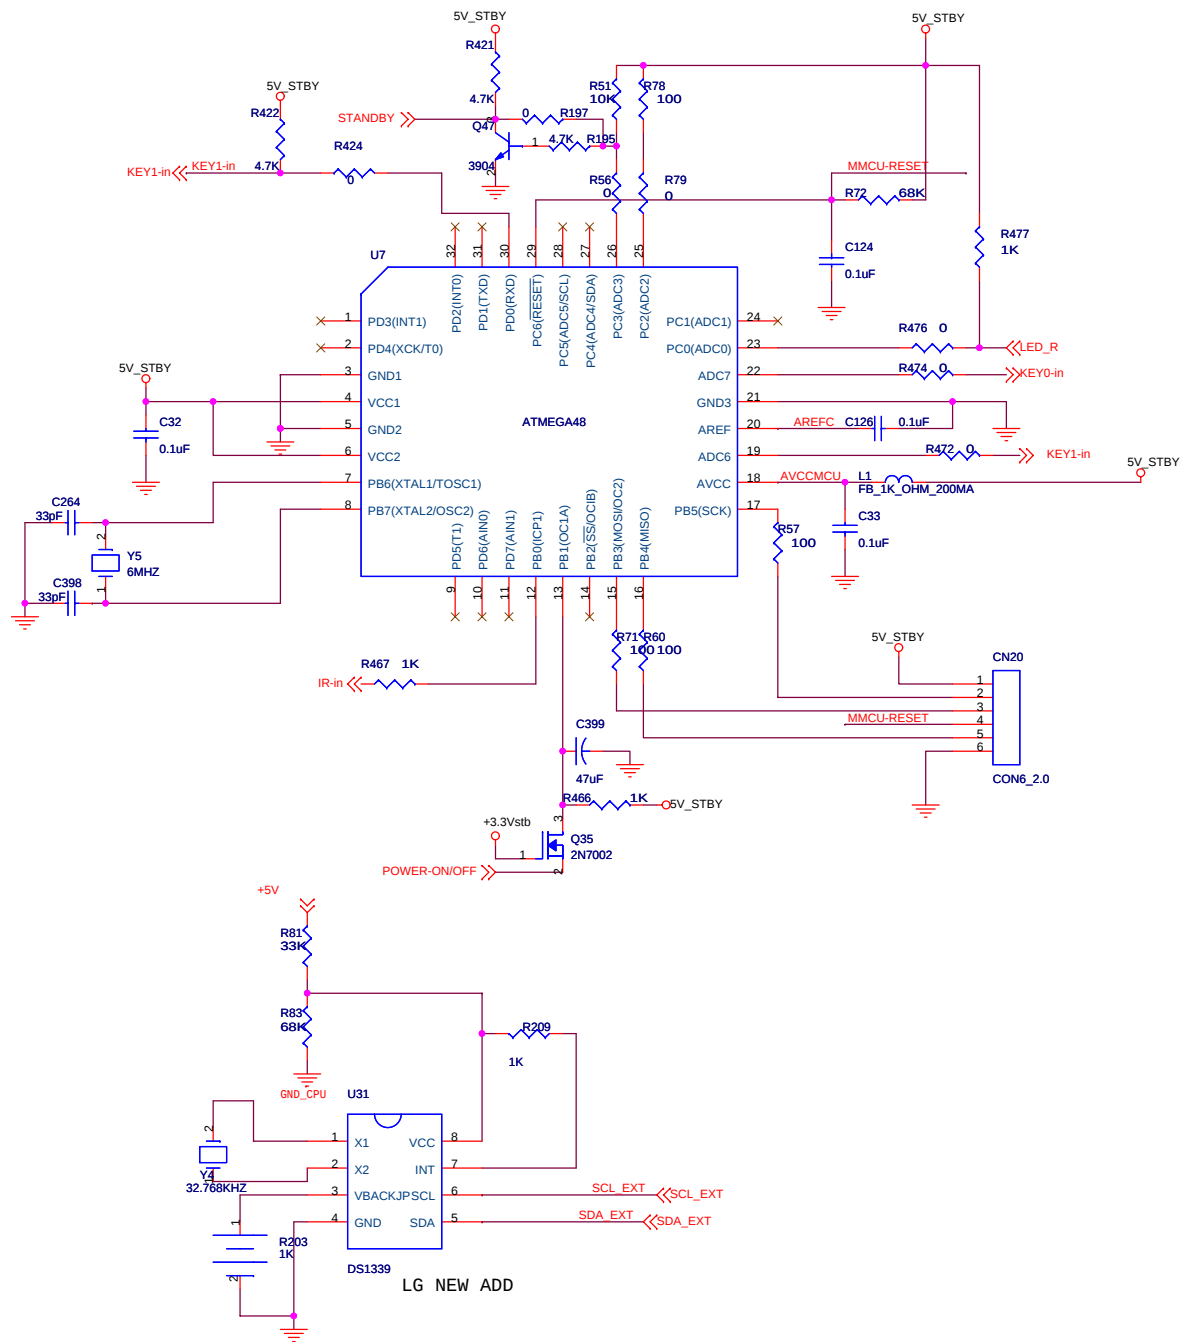


Title				<Title>			
Size		Document		Number		Revision	
A3		<Doc>		TV160		Rev1	
Date				Thursday, January 31, 2008			

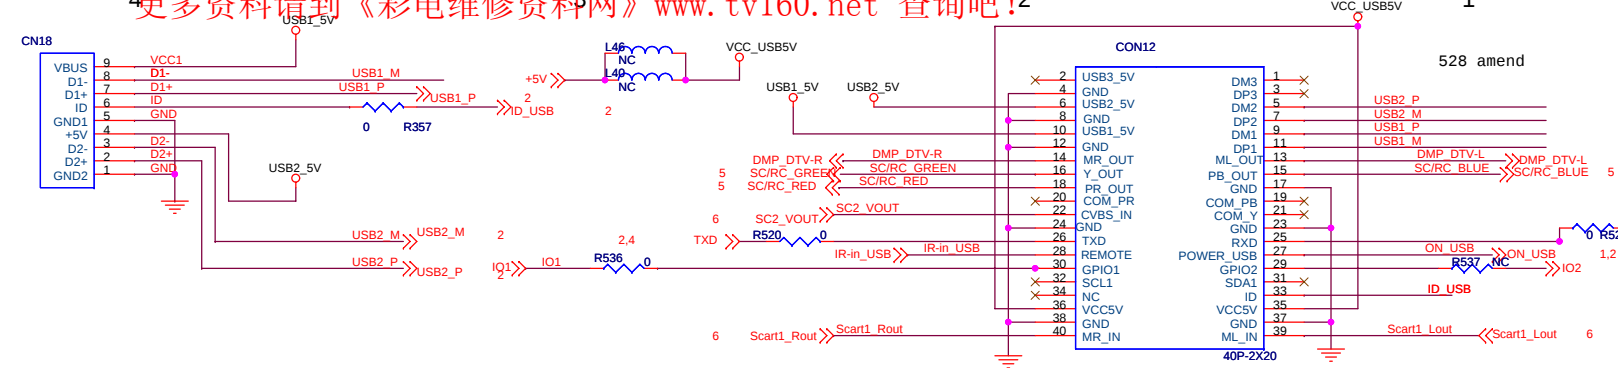

Vcc1.8 for MST9E19A

VDDC for MST9E19A Core

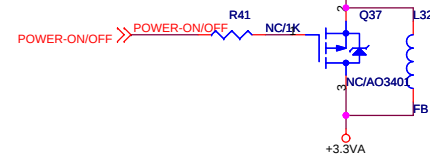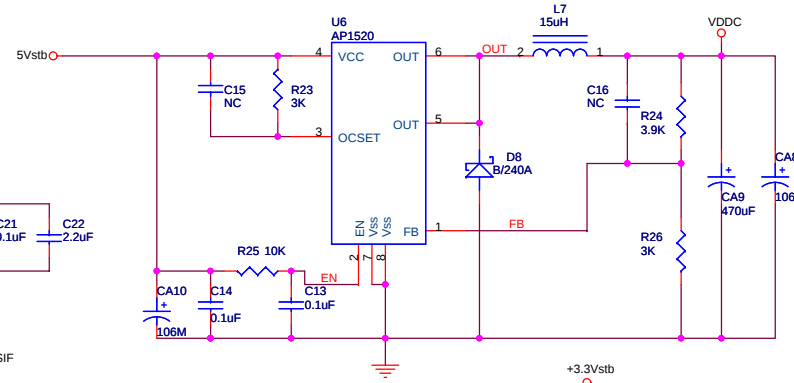

+3.3AVDD for
AVDD_HDMI

+3.3AVDD for AVDD_AU


+3.3AVDD for
AVDDA +3.3V

+3.3AVDD
for AVDD_SIF


3.3V for AVDDPLL2

+3.3V for VDD_MPLI

Vcc3.3for MST9E19A
Digital

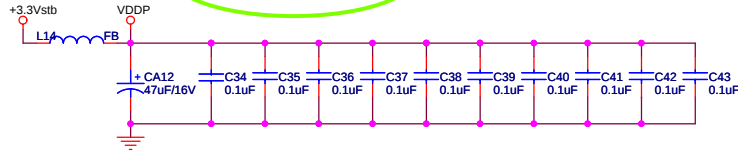


Vcc3.3for MST9E19A analog

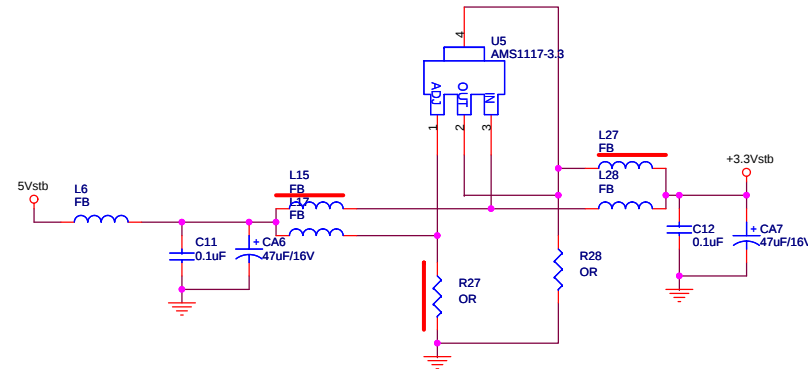

		深圳市高新区南区科技南十路国际技术创新研究院C座4楼	
TEL:0755-26996895		FAX:0755-26996830	
Title		power	
<Title>		彩电维修资料	
Size A3	Document Number	TV160 彩电维修资料	
<Doc>	MST0E1	http://www.tv160.net	
Date:	Thursday	January 31, 2006	Size: 2




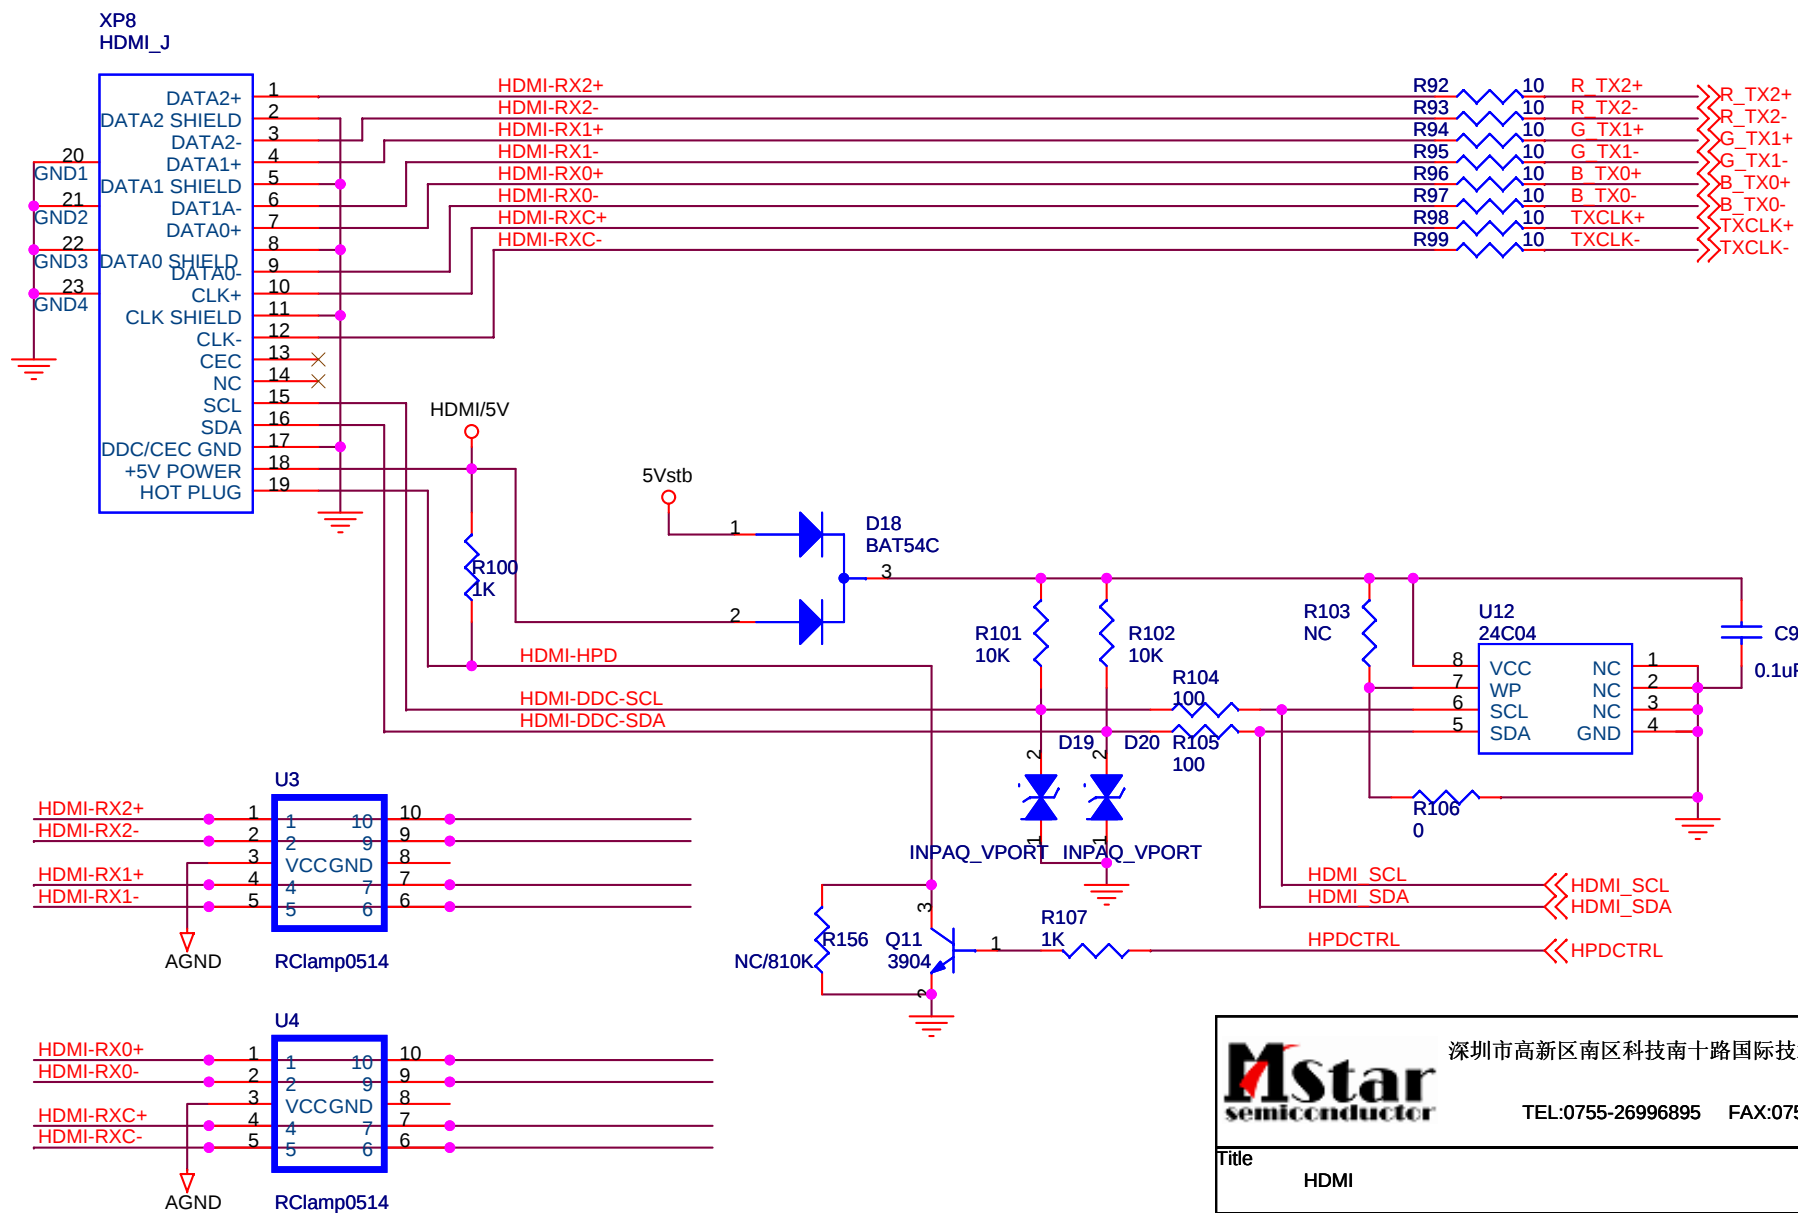


 深圳市高新区南区科技南十路国际技术创新研究院C座4楼
 TEL:0755-26996895 FAX:0755-26996830

Title		HDMI
Size A	Document Number	MST9E19A
Date:	Thursday, January 31, 2008	Sheet

Rev

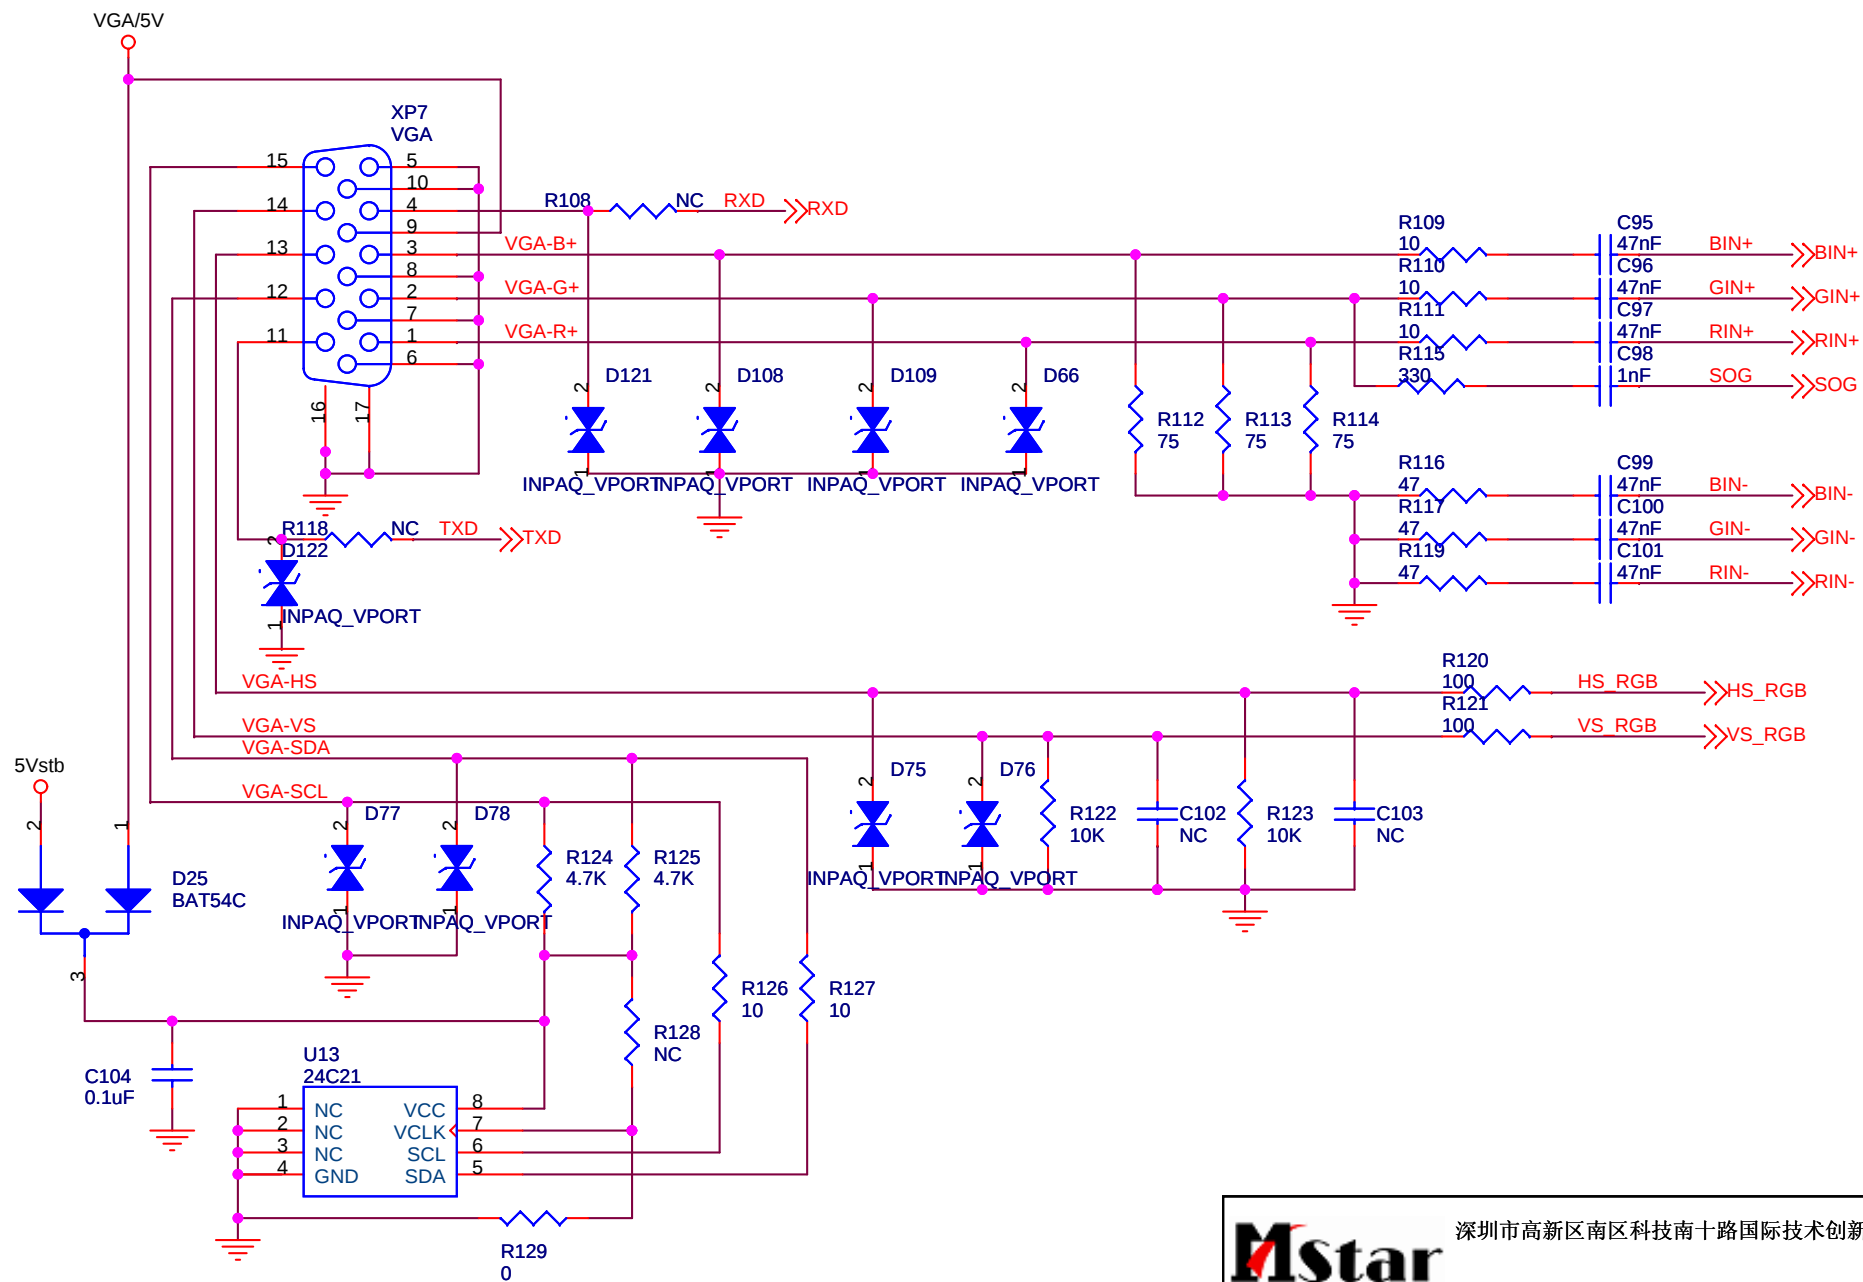

深圳市高新区南区科技南十路国际技术创新研究院C座4楼

TEL:0755-26996895 FAX:0755-26996830

Title

VGA

Size
A


Document Number
MST9E19A

Rev


Date: Thursday, January 31, 2008

Sheet



Component Input

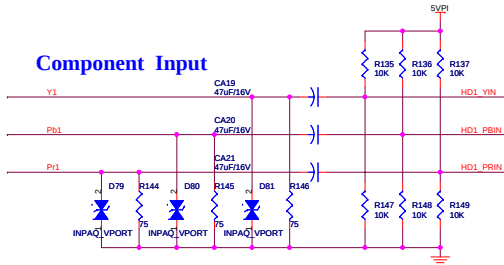

PC/Component Audio Input


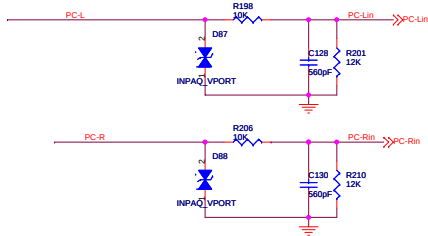


LG NEW CHANGE





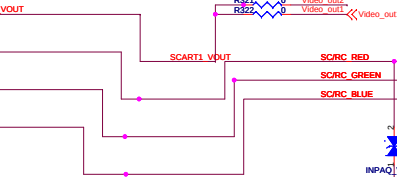



USB读卡器的图像YPbPr格式
与SCART1的RGB共用


AV2&AVOUT

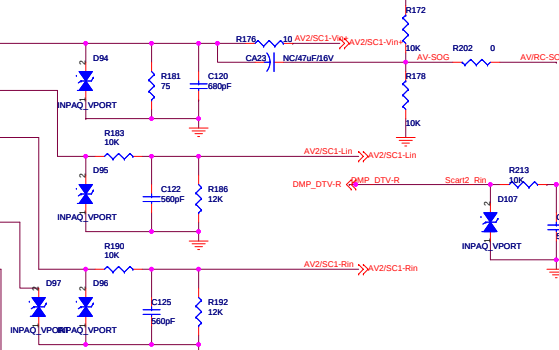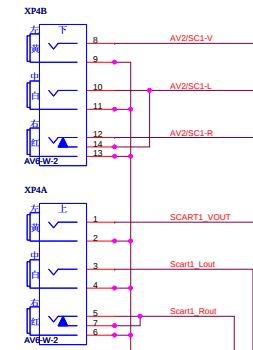

USB读卡器的声音左右声道
与SCART2的声音输入共用

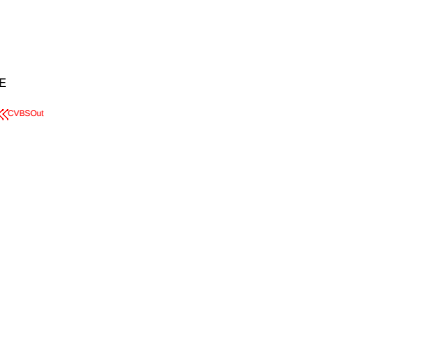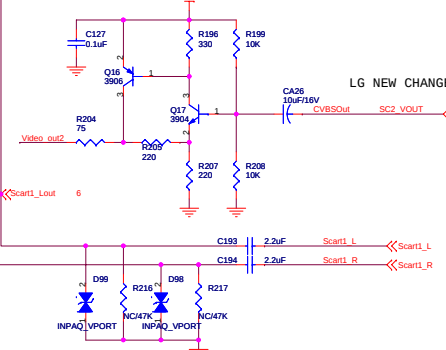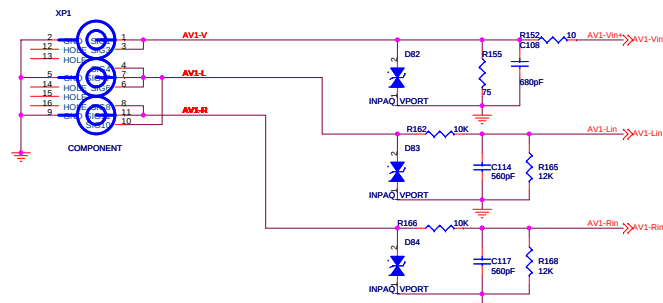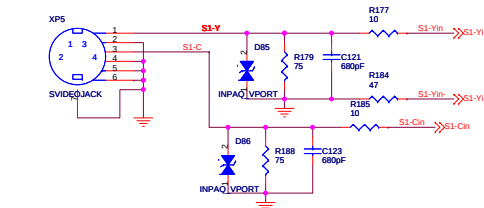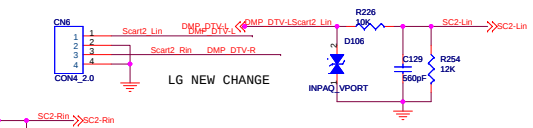

I2C ADDRESS(R263 NC):
READ is 0X87
WRITE is 0X86

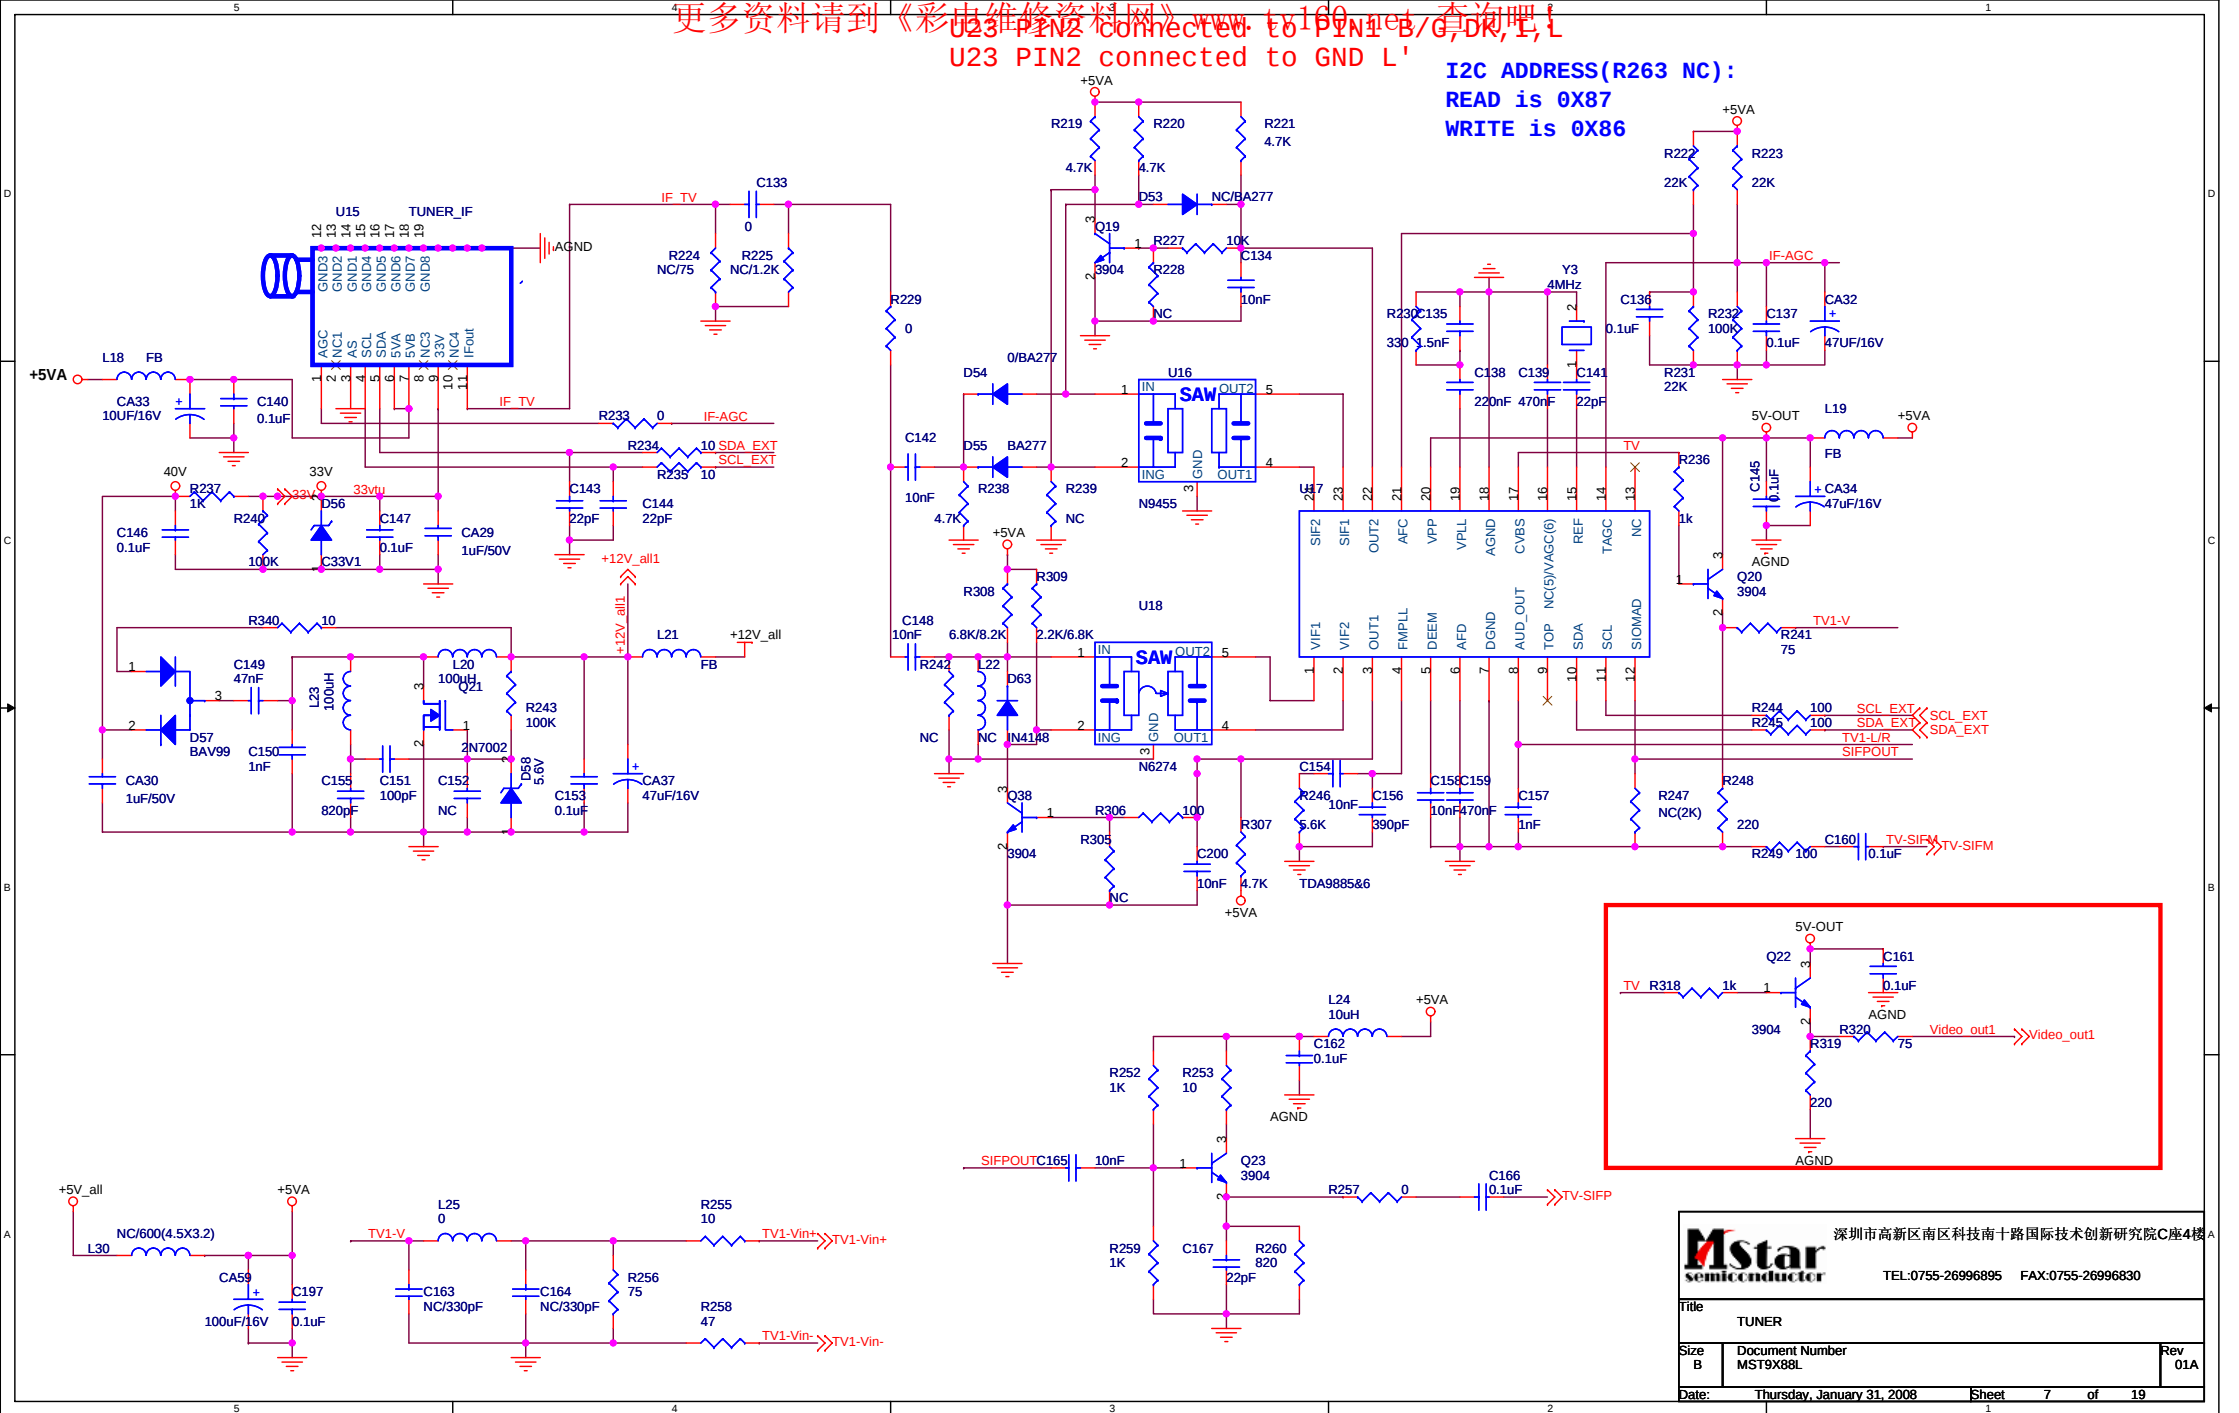

Audio OP(AUOUTL3/AUOUTR3; AUOUTL2/AUOUTR2)

