

	1	2	3	4	5	6
D						
C						
B						
A						



UOC
UOC_III.Sch



SAA49101
SAA4910X.Sch




TDA8380
TDA9333.Sch




interface
interface.Sch



Title		
Size B	Number	Revision
Date:	2-Jul-2007	Sheet of
File:	EA资料Philipsdigital电路图\TV501digital\2000\2000GP28(2000PP).ddb	10 of 10

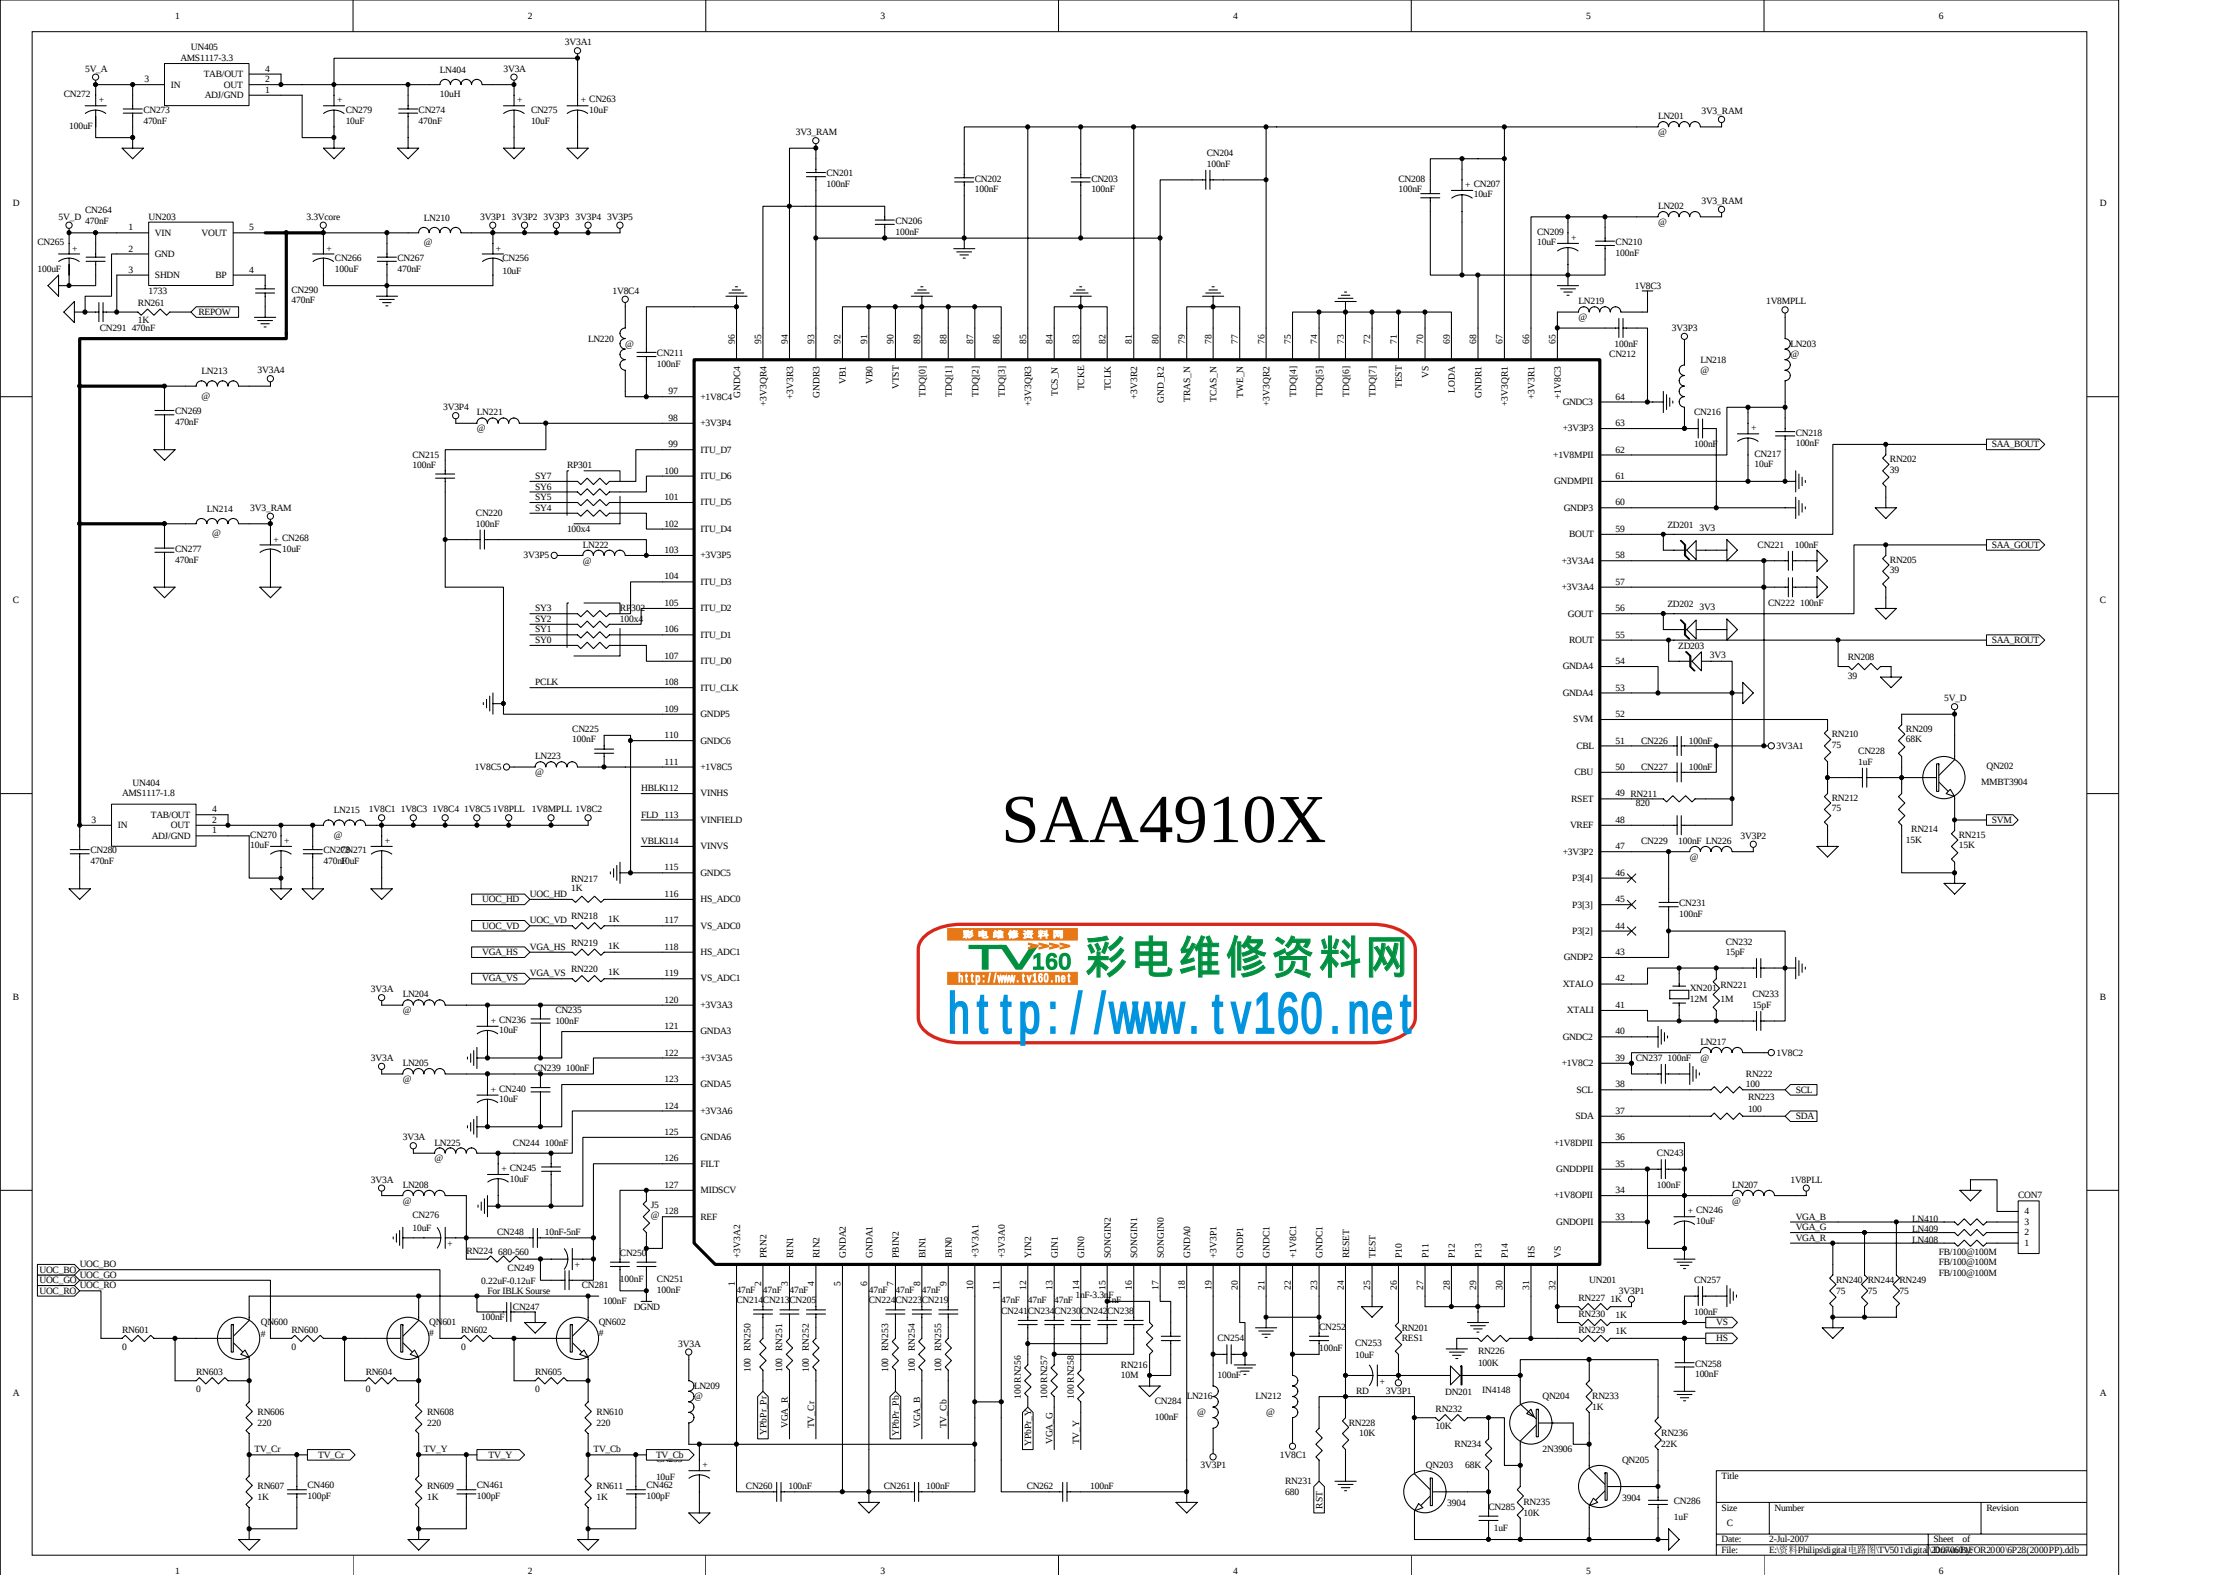

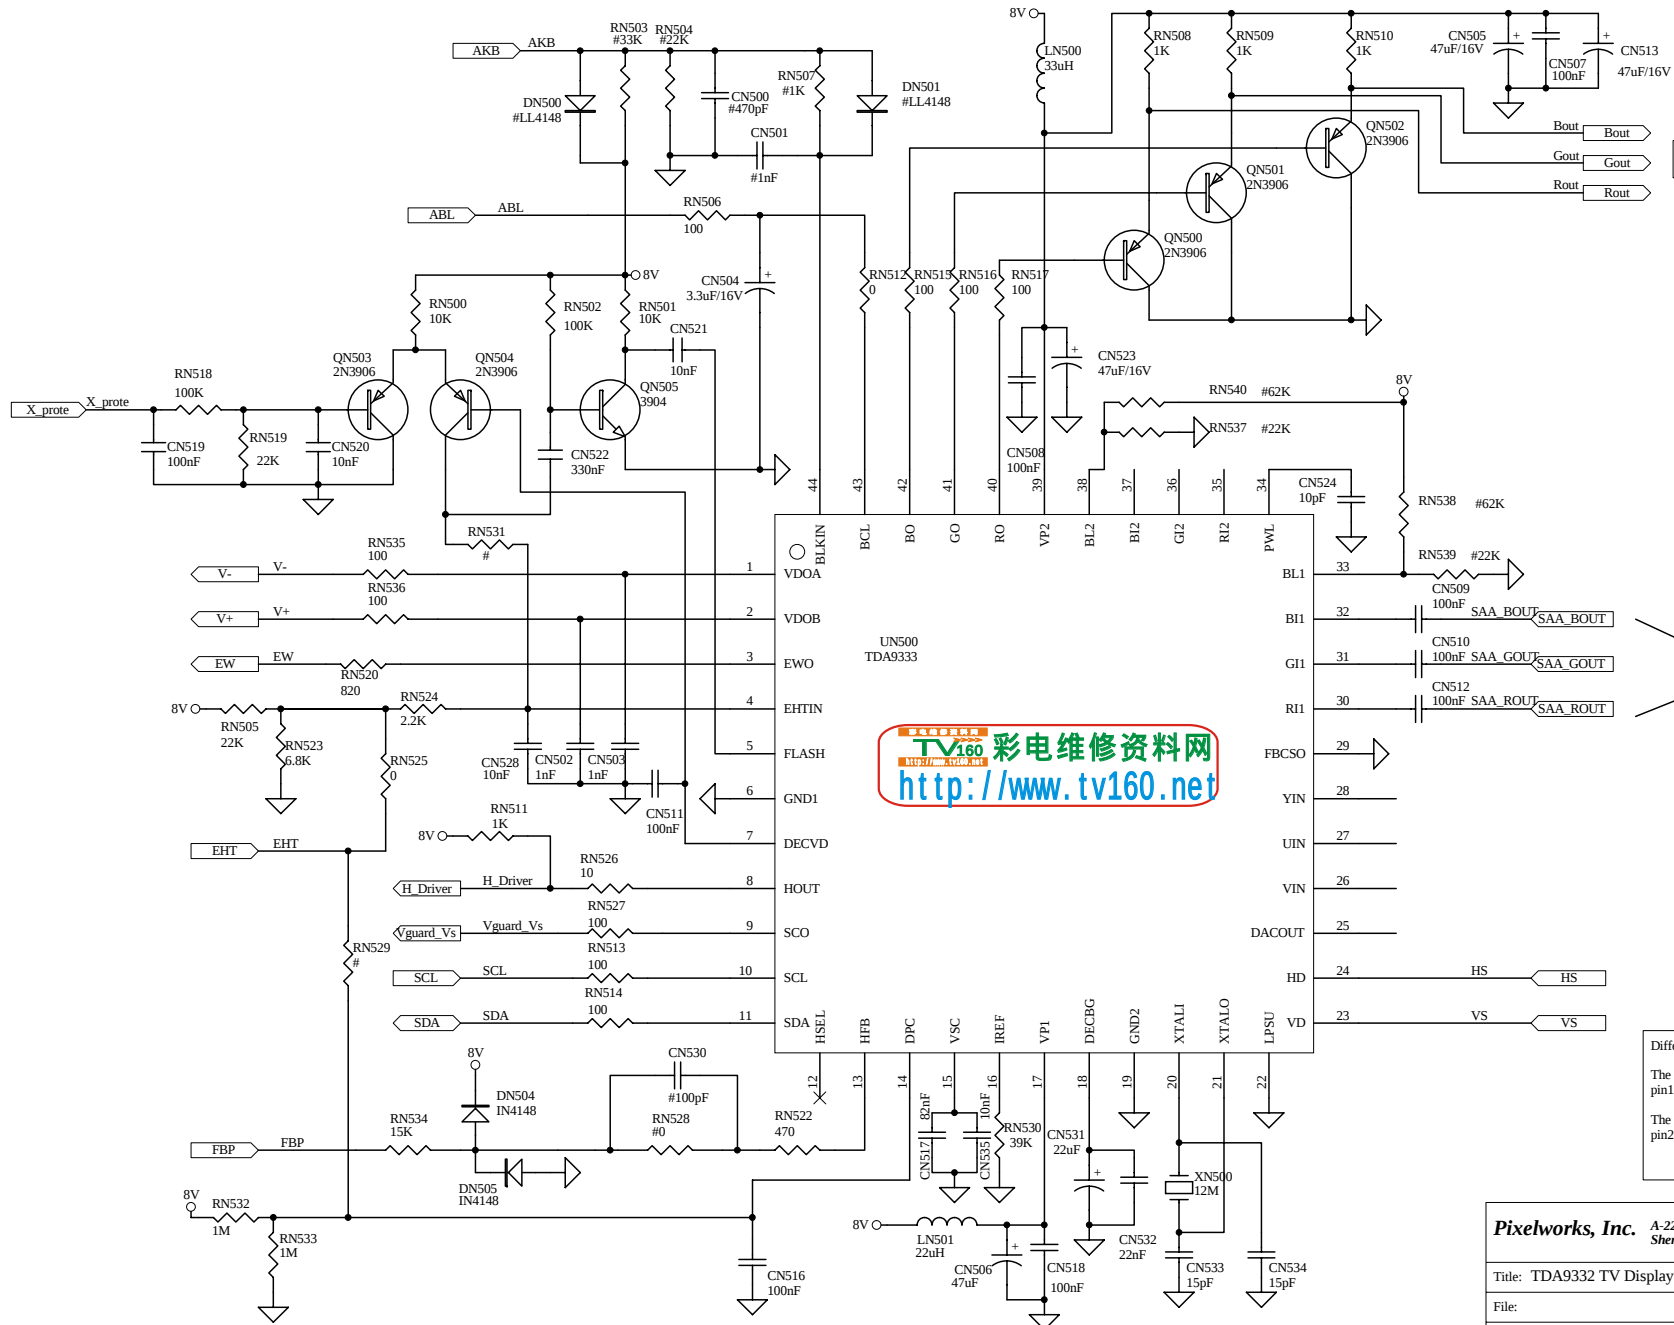

To CPT Board


From SAA49101

Differences between the TDA9330 and the TDA9333:





The following pins must be left open:
pin12, pin25, pin26, pin27, pin28, pin33, pin44.

The following pins must be connect to ground:
pin22, pin29.

Pixelworks, Inc.		A-2205 World Trade Plaza, Futian District Shenzhen P.R.China, 518033		Phone: 86-755-3679633 Fax: 86-755-3690623	
Title: TDA9332 TV Display Processors			Number:	Revision:	Size:
File:			Brawn:	Date:	
Eng. Appr.:		Date:	Sheet 7 of 10		Printed Date/Time:



HEADER 9X2



RGB Output for CRT Board

