




Power INPUT

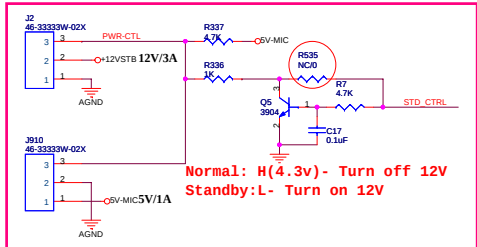


Power Management IC




For 12V only Power input used

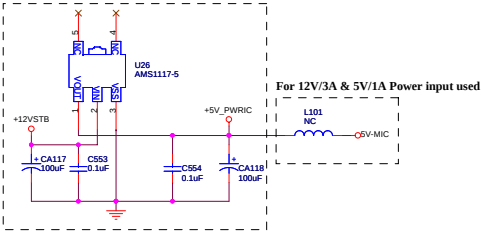


Called-ID Interface

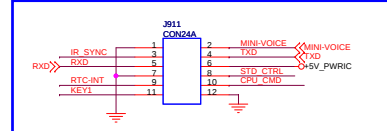



LCD Power

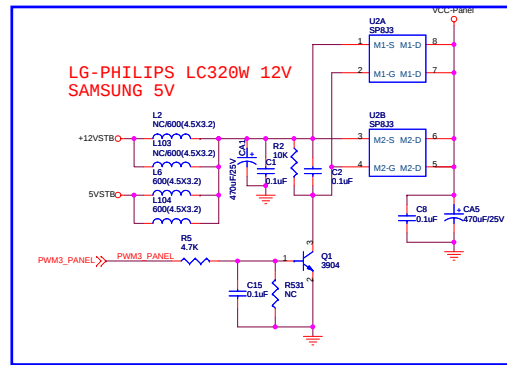

Tuner Power

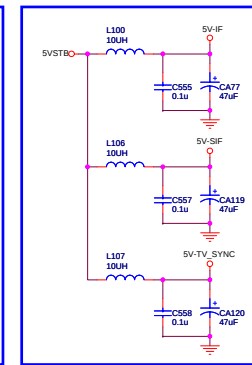

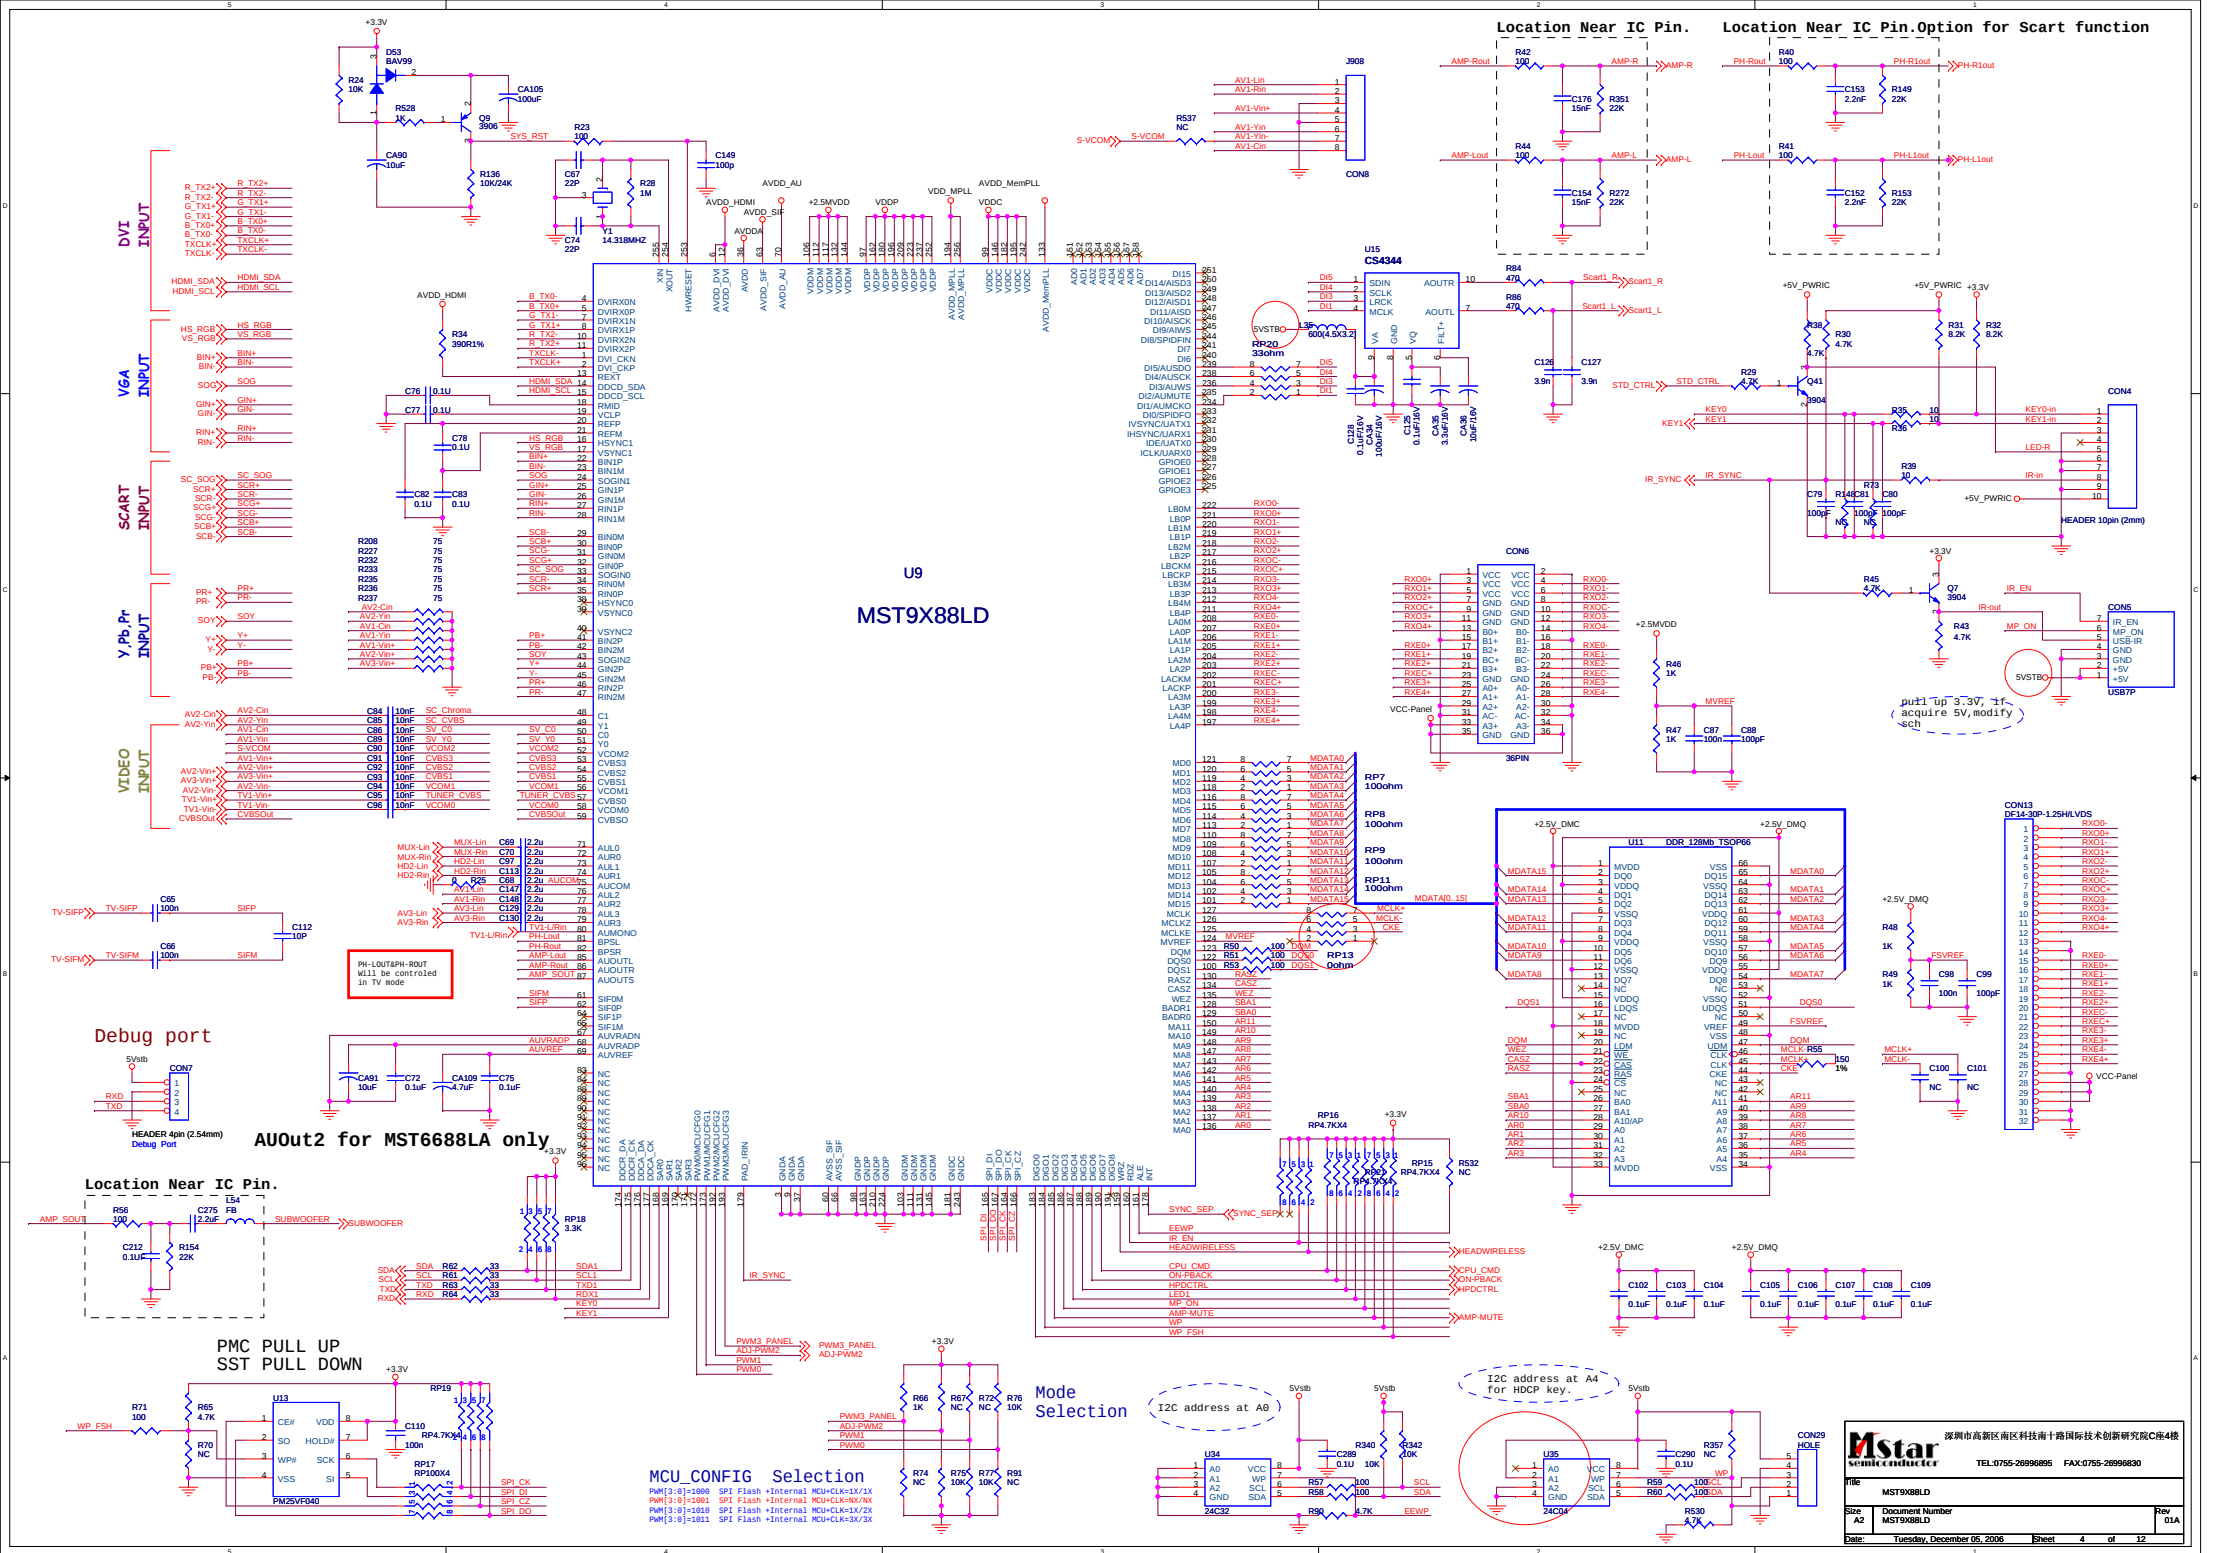

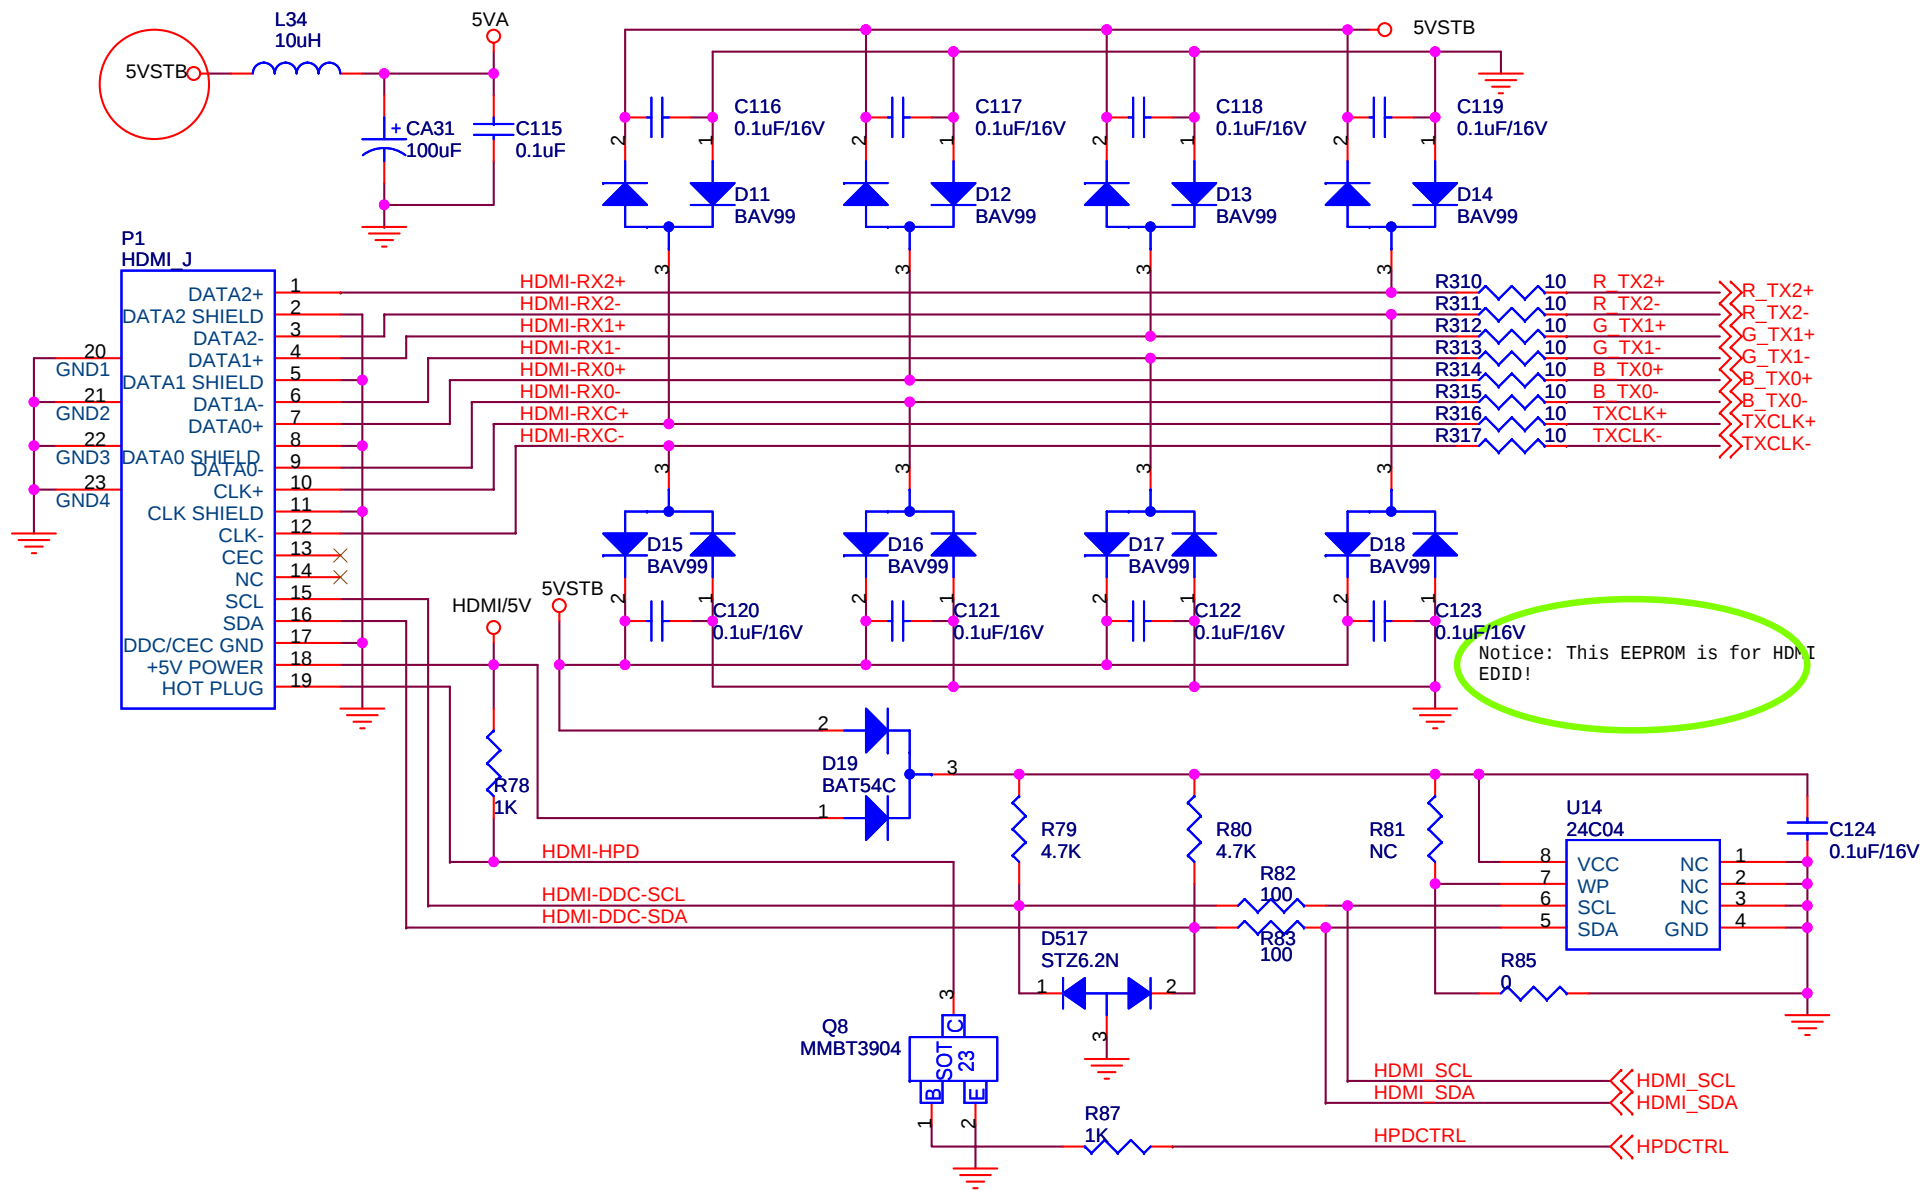

HD1_PRIN >> HD1_PRIN

HD1_PBIN >> HD1_PBIN

HD1_YIN >> HD1_YIN

L46 0

L47 0

L48 0

C162 NC

R129 75

C163 NC

R130 75

C164 NC

R131 75

R123 47

R124 47

R125 47

R126 470

R127 47

R128 47

R135 47

C156 47nF

C157 47nF

C158 47nF

C159 1nF

C160 47nF

C161 47nF

C166 47nF

PR+ >> PR+

PB+ >> PB+


Y+ >> Y+

SOY >> SOY

PR- >> PR-


PB- >> PB-

Near to MSTAR IC

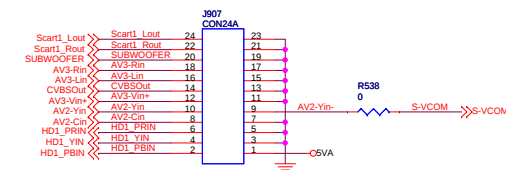
[illegible]

TUNER CONNECT


I2C ADDRESS:
READ is 0X87
WRITE is 0X86
9886 I2C ADDRESS is 0X84

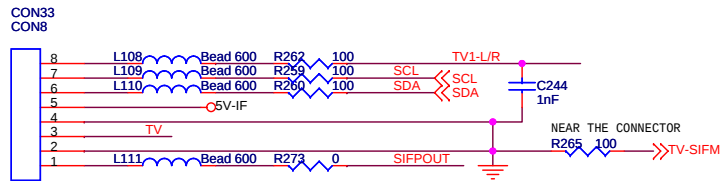


TV SIF & MONO

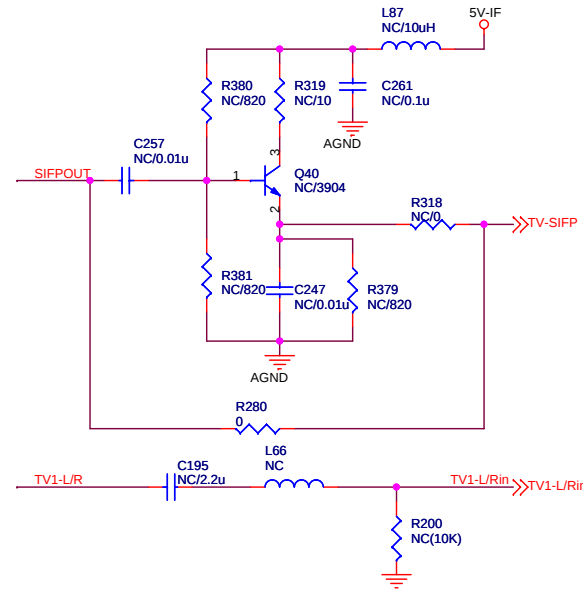



TV CVBS

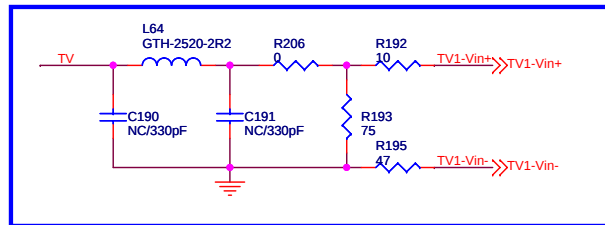


TV SYNC. Circuit

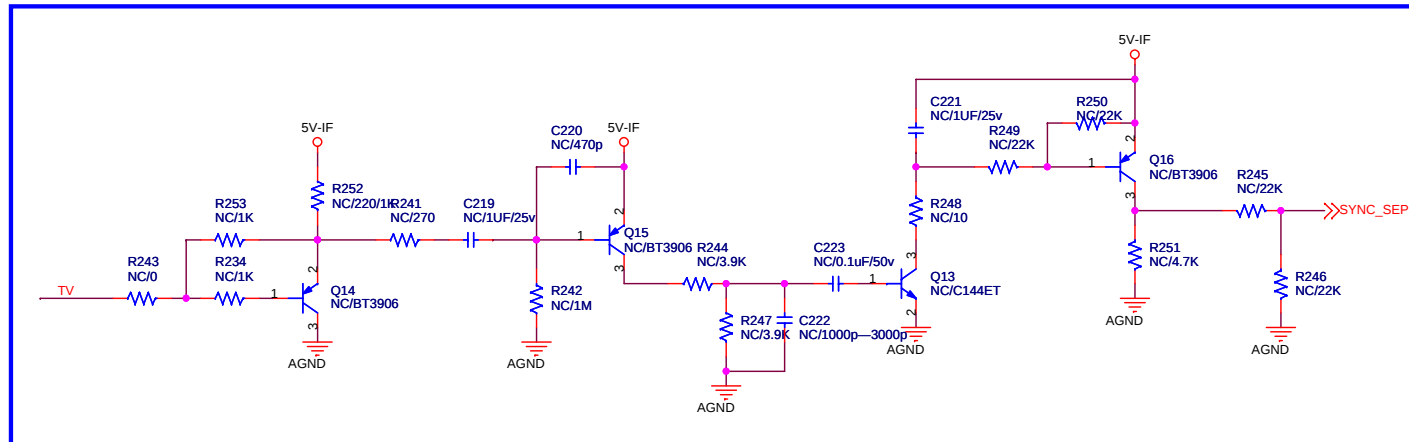

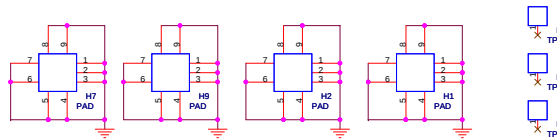[illegible][illegible]

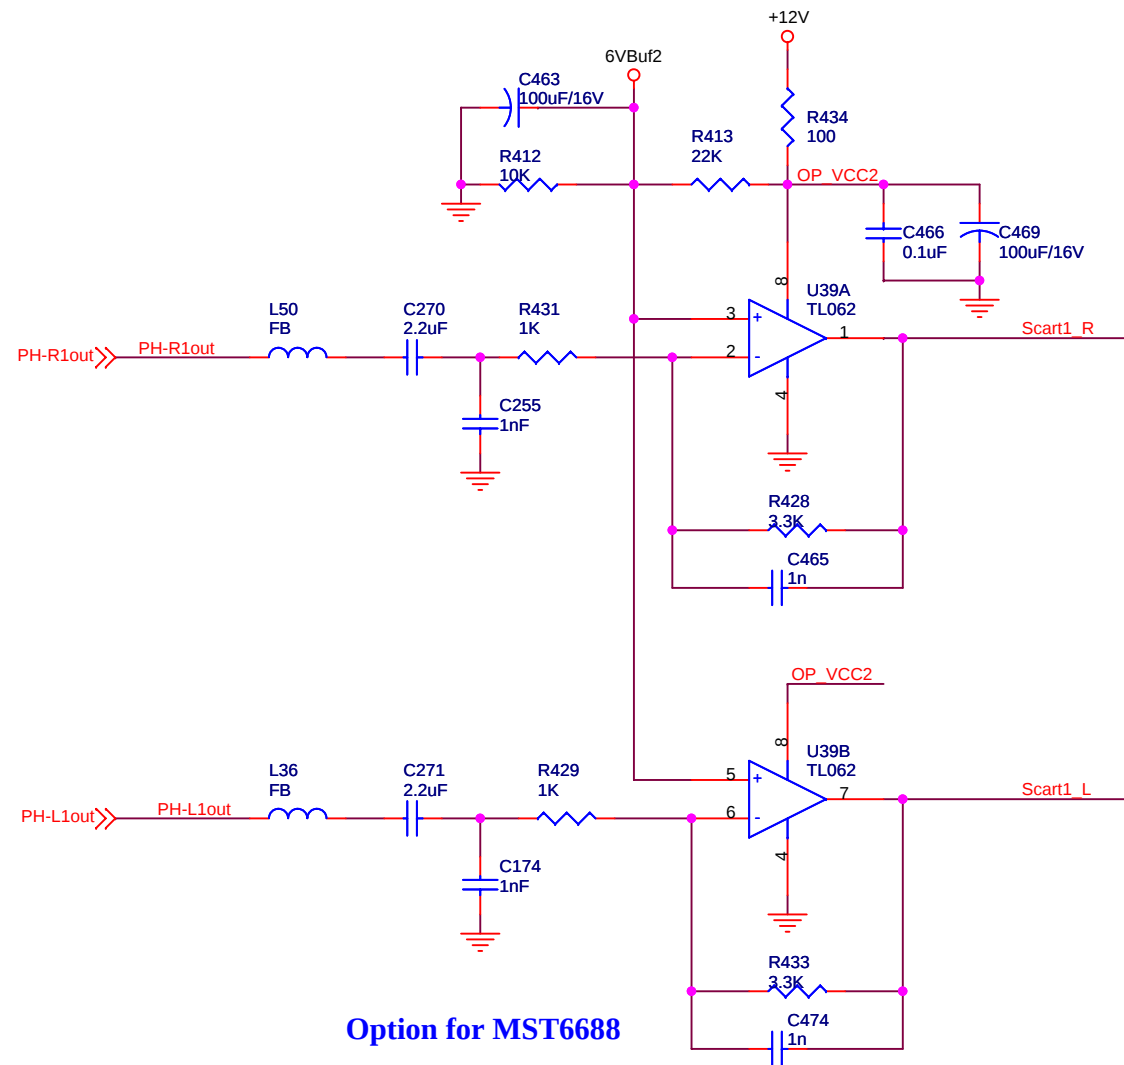

Option for MST6688

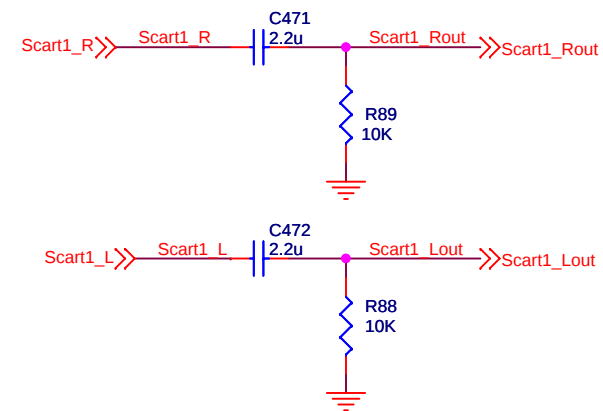

OPTION FOR 66XX OR TVinput IS MONO

Title		
MSTAR		
Size	Document Number	Rev
A4	1	01A
Date:	Thursday, August 10, 2006	Sheet 10 of 12